



MECHANICAL LIFT SYSTEMS

**RELIABLE
MECHANICAL
LIFTS
FOR REPETITIVE
LIFTING TASKS**

**BUILT
TOUGH
FOR
RELIABLE
MATERIAL
HANDLING
SERVICE**



CAPACITY
300 lbs.

LIFE TRAC 2500

**FIVE STANDARD END EFFECTORS AVAILABLE WITH
CUSTOM END EFFECTORS ENGINEERED TO YOUR SPECS**



**COMPACT
TELESCOPING MAST
DESIGN, FITS INTO
TIGHT AREAS,
EXTENDS TO REACH
HIGH PLACES**



**QUICK CHANGE END EFFECTORS
FOR MULTIPLE APPLICATIONS**

**BALL AND SCREW ACTUATOR FOR
CLEAN RELIABLE SERVICE**

**RUGGED STAINLESS STEEL
AND ALUMINUM CONSTRUCTION**

**REMOVABLE 12V
BATTERY WITH SPARE
STORED IN CHARGER -
NEVER ANY DOWN TIME**

**INDESTRUCTIBLE POLYCARB BUMPERS PROTECT EQUIPMENT
AND PREVENT ACCIDENTAL BUMP INJURIES**

**EASY ROLL WHEELS
MAKE MANEUVERING HEAVY
LOADS A BREEZE**



**LOW CONTOUR WHEELS
AVAILABLE FOR MINIMUM
CLEARANCE APPLICATIONS**

**INDEPENDENTLY ADJUSTABLE LEGS TO FIT
UNDER AND AROUND EXISTING EQUIPMENT
BASES AND MOUNTS**



ROLLER TABLE SWIVELS 360 DEGREES AND LOCKS TO
CREATE A STABLE TRANSPORT SURFACE



BALL TABLE ALLOWS LOADS TO ROLL ON FROM EVERY
DIRECTION AND LOCKS TO CREATE A SLIP-PROOF
CARRYING SURFACE



RUGGED STAINLESS STEEL OR ALUMINUM TABLE FOR
SIMPLE MATERIAL HANDLING TASKS



FORKS ARE INDEPENDENTLY ADJUSTABLE FOR MULTIPLE
APPLICATIONS



ROLL MANIPULATOR IS FULLY ACTUATED FOR 3 OR 6 INCH CORES WITH BOOM
LENGTH EASILY CUSTOMIZED FOR LONGER REACH



FIVE STANDARD END EFFECTORS AVAILABLE WITH CUSTOM ENGINEERED EFFECTORS MADE TO YOUR SPECS

CARRIAGE RELEASES THE END EFFECTOR WITH TWO SPEED PINS



ALL END EFFECTORS ARE STORED IN COMPACT STORAGE STANDS FOR EASY CHANGE OVER

SPECIFICATIONS

MAXIMUM LIFTING CAPACITY 300 LBS
(MINUS WEIGHT OF END EFFECTOR)

MAST HEIGHT RETRACTED 58.5 inches
EXTENDED 94.5 inches

TABLE (END EFFECTOR) HEIGHT	STANDARD	MIN	2.25 inches
		MAX	74.25 inches
	CUSTOM	MIN	FLOOR
		MAX	68.25 inches

LEG WIDTH RANGE (FIELD ADJUSTABLE) 25-36 inches

LENGTH 34 inches

WEIGHT (WITHOUT END EFFECTOR) 120 LBS

SPEED 2 - 3 inches per second

BATTERY SEALED GEL CELL

VOLTS 12V-DC


DETACHABLE CONTROL PENDANT STANDARD

LOCKABLE CASTORING WHEELS STANDARD


WHEEL DIAMETER 5 inches (OR TO YOUR SPECS)

DIMENSIONS

RETRACTED

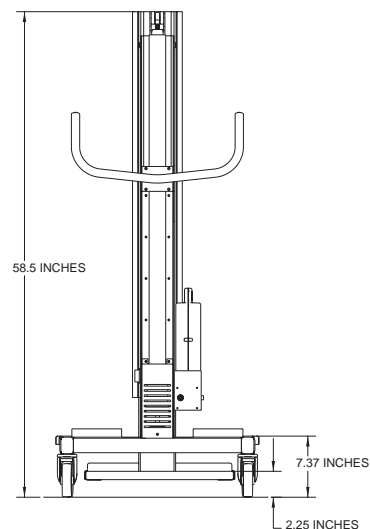

EXTENDED

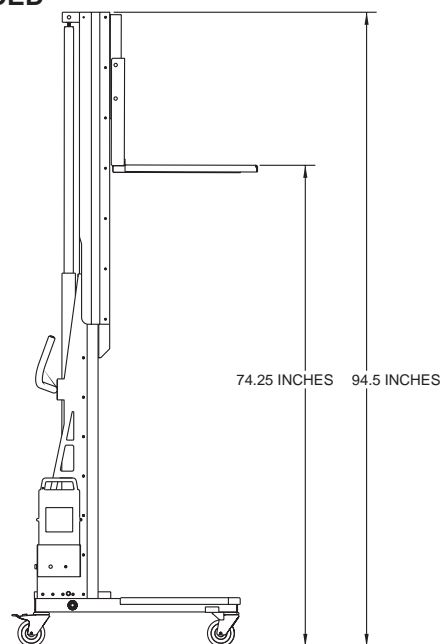

LIFTTRAC
2500

1-800-510-6211

www.liftrac.com

LEG WIDTH RANGE

