

- High capacity 3 Ah Li-ion battery
- Compact size (LxHxW): 9-1/8" x 9-27/32" x 2-61/64"
- Light weight (incl. battery): 5.39 lbs.
- High power: 575 in.lbs.
- Variable speed/reversible:
 - Low: 100-400 rpm High: 350-1,500rpm
- Clutch Torque (Approx.):
 - 8.8-61.0 in.lbs. (3.0 in.lbs. per stage, total 18 stage)
- 1/2" Heavy duty keyless chuck
- Charging Time (using EY0L80B charger)*:
 - Usable: 45 minutes Full: 60 minutes
- Electronic Performance Monitoring System
- Electric brake
- LED work light
- With an extra battery pack as standard equipment
- Max. Drill Diameter:
 - in Wood: 1-1/2" dia. in Metal: 1/2" dia.
- Max. Screws Driving:
 - Wood screw: 3/8" dia.
 - Self-drilling screw: 15/64" dia.

REVOLITHIUM

NEW




Typical Application

- General construction
- Plumbing
- Finishing carpentry
- Electric installation work

Featuring a new gear system and motor capable of withstanding tough continuous work!

All-Metal gear system

The use of metal gears for switching between high- and low-speed operation reduces part wear and offers superior durability compared to plastic gears, decreasing the frequency of tool breakdowns.

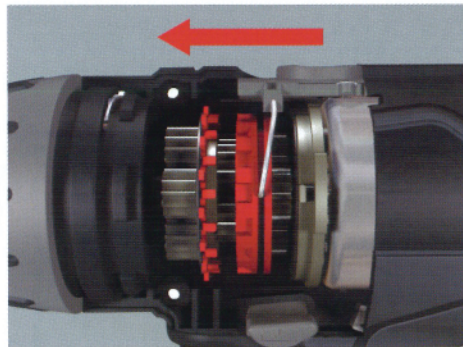

Fan cooled ventilated motor

The use of a 21.6 V high-power lithium-ion battery and a motor with a high cooling efficiency helps keep the motor temperature low even during tough work, making the drill well suited to use in repetitive tasks.




Expansion of performance range

Application Capability (Temperature of circumference: about 68 F, Interval of work: about 10 sec.)

<Wood hole saw drilling>

Drill Diameter (inch)

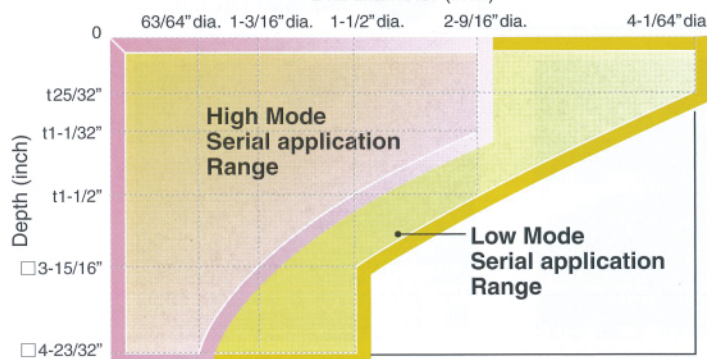

Well balanced to reduce fatigue



White LED light