


SECONDARY SUPPORT CABLE
(H35460016)

ASSEMBLE THE LINK AT ANY ONE OF THE THREE LUGS, WHICH SECURE THE SPRING HOUSING, THAT IS LOCATED CLOSEST TO A SUPPORTING MEMBER. INSERT 3 INCHES OF WIRE ROPE THROUGH THE HOLE IN THE LINK AND THEN BEND THE WIRE ROPE BACK TO FORM A LOOP. ASSEMBLE THE CLAMP TO THE TWO THICKNESSES OF WIRE ROPE SO THAT AT LEAST 3/4 INCH OF WIRE ROPE END PROTRUDES BEYOND THE CLAMP. LOOP THE OTHER END OF THE WIRE ROPE AROUND THE SUPPORTING MEMBER AND WHILE KEEPING THE WIRE ROPE TAUT BETWEEN THE REEL AND THE SUPPORTING MEMBER, ASSEMBLE THE SECOND CLAMP TO THE LOOP AT THE SUPPORTING MEMBER. HERE TOO THE END OF THE WIRE ROPE SHALL PROTRUDE AT LEAST 3/4 INCH BEYOND THE CLAMP. CHECK TO ASSURE ALL CLAMP NUTS ARE TIGHT.

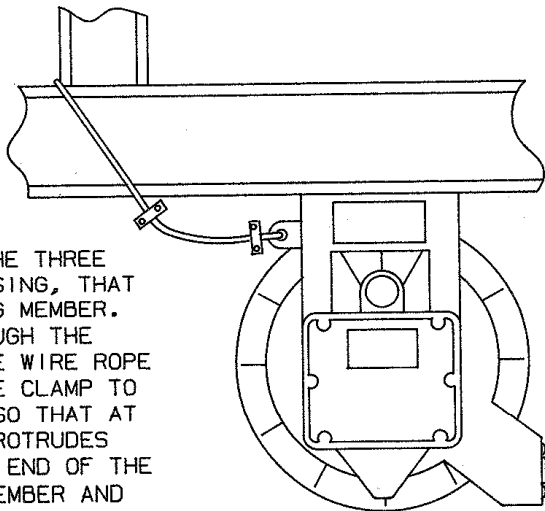

S73110001

#S73110001