

**Cleco**<sup>®</sup>  
LEADING WITH INNOVATION

# Cleco Cordless

**LIVewire**<sup>™</sup>

**World's First Cordless  
Tools For Safety  
Critical Fastening.**



**COOPER** Power Tools

# The Most Cost-Effective Safety

LiveWire™ is the ultimate wireless error-proofing solution. "Wi-Fi Certified" to function with your production requirements. One line controller manages up to 10 cordless tools creating the most cost effective solution available today. Line controllers maintain direct communications with plant networks and provide local data storage, troubleshooting and programmability to the cordless tools. Each tool is equipped with a unique IP address along with a 512-cycle memory buffer to ensure no safety critical data is ever compromised.



**10 Tools.  
1 Line  
Controller.**



# ty Critical Solution Available.



**FC**  
Wi-Fi Certified



# All The Brains. All The Power.

LiveWire™ offers built-in wireless intelligence for “safety critical fastening” and provides users superior torque and angle control features in a lightweight, cordless design.

With up to 1,000 tightening operations (hard joints) per battery charge, LiveWire™ delivers ultimate freedom, flexibility and increased productivity.

Quality assurance is validated real-time utilizing our reaction transducer and high-resolution resolver, then transmitted wirelessly.

## Electronic Intelligence

- On-board controller with power management
- Integrated servo with I/O signal handling
- Corded functionality in a cordless solution



## Low vibration soft grip handle



## High Resolution Resolver

- Rotor position detection
- Angle control and monitoring for Quality Assurance
- Full range speed control for operator ergonomics



## Operator Status Display

- Configurable real-time 3 line display
- Green/Red LCD for status
- 2 configurable application buttons
- Multiple LED status indicators

## Low compression trigger

## Battery Technology

- 26V, 1.6 Ah Li-Ion rechargeable battery
- High power-to-weight technology
- Up to 1,000 cycles per charge (hard joint)
- >500 charging cycles
- Fully charged in 1 hour



# Power. And It's Wireless.

**Solid metal construction for maximum durability**

## **Integrated Bar Code Scanner** (optional)

- Enables real-time bar code data collection
- Programmable bits for Auto Parameter Select
- Tool enable and disable configurability

**Precision Gearing**


**Configurable LED Illumination**

## **Brushless Motor**

- Superior performance with full range speed control
- Low rotor inertia for high torque accuracy

## **Reaction Transducer**

- Accurate detection of torque via Strain Gage Bridge
- Torque accuracy:  $Cmk > 1.67$
- Torque traceability of safety critical joints



# Cleco 17B & 47B Cordless Tool Specifications

Model Number	Torque Range		Free Speed RPM	Weight* Less Battery		Output Drive Size	Length		Voltage
	ft. lbs.	Nm		lbs.	kg		in.	mm	

## Pistol Tool Series

17BPB05Q	2.2-3.7	3-5	1639	2.8	1.29	1/4" Hex	8.44	214.5	26
17BPB07Q	2.2-5.2	3-7	1161	2.8	1.29	1/4" Hex	8.44	214.5	26
17BPB09Q	2.2-6.6	3-9	887	2.8	1.29	1/4" Hex	8.44	214.5	26
17BPB13Q	2.2-9.6	3-13	629	2.8	1.29	1/4" Hex	8.44	214.5	26

## Angle Tool Series

47BAB15AM3	4.1-11.1	5.5-15	538	4.3	1.95	3/8" SQ	21.79	553.5	26
47BAB21AM3	5.9-15.5	8-21	411	4.3	1.95	3/8" SQ	21.79	553.5	26
47BAB28AM3	7.4-20.7	10-28	291	4.3	1.95	3/8" SQ	21.79	553.5	26
47BAB35AM3	9.6-25.8	12-35	244	4.9	2.22	3/8" SQ	23.05	585.5	26
47BAB50AM3	13.3-36.9	18-50	182	5.0	2.27	3/8" SQ	23.39	594.0	26

\* Weight of 26V Li-Ion battery (1.04lbs./0.47kg).


### GENERAL:

All tools must be used with Cooper line Controller.


### STANDARD EQUIPMENT:

One 26V Li-Ion battery  
Integrated infrared communications



## Pistol Tool Series 3-13 Nm

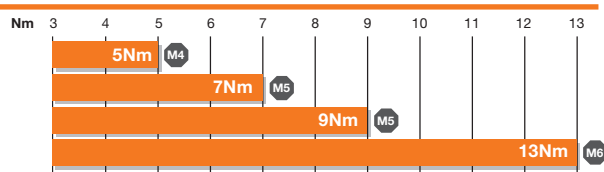

## Angle Tool Series 5-50 Nm

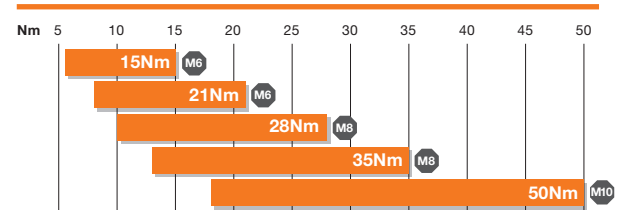

## Cordless Tools Nomenclature

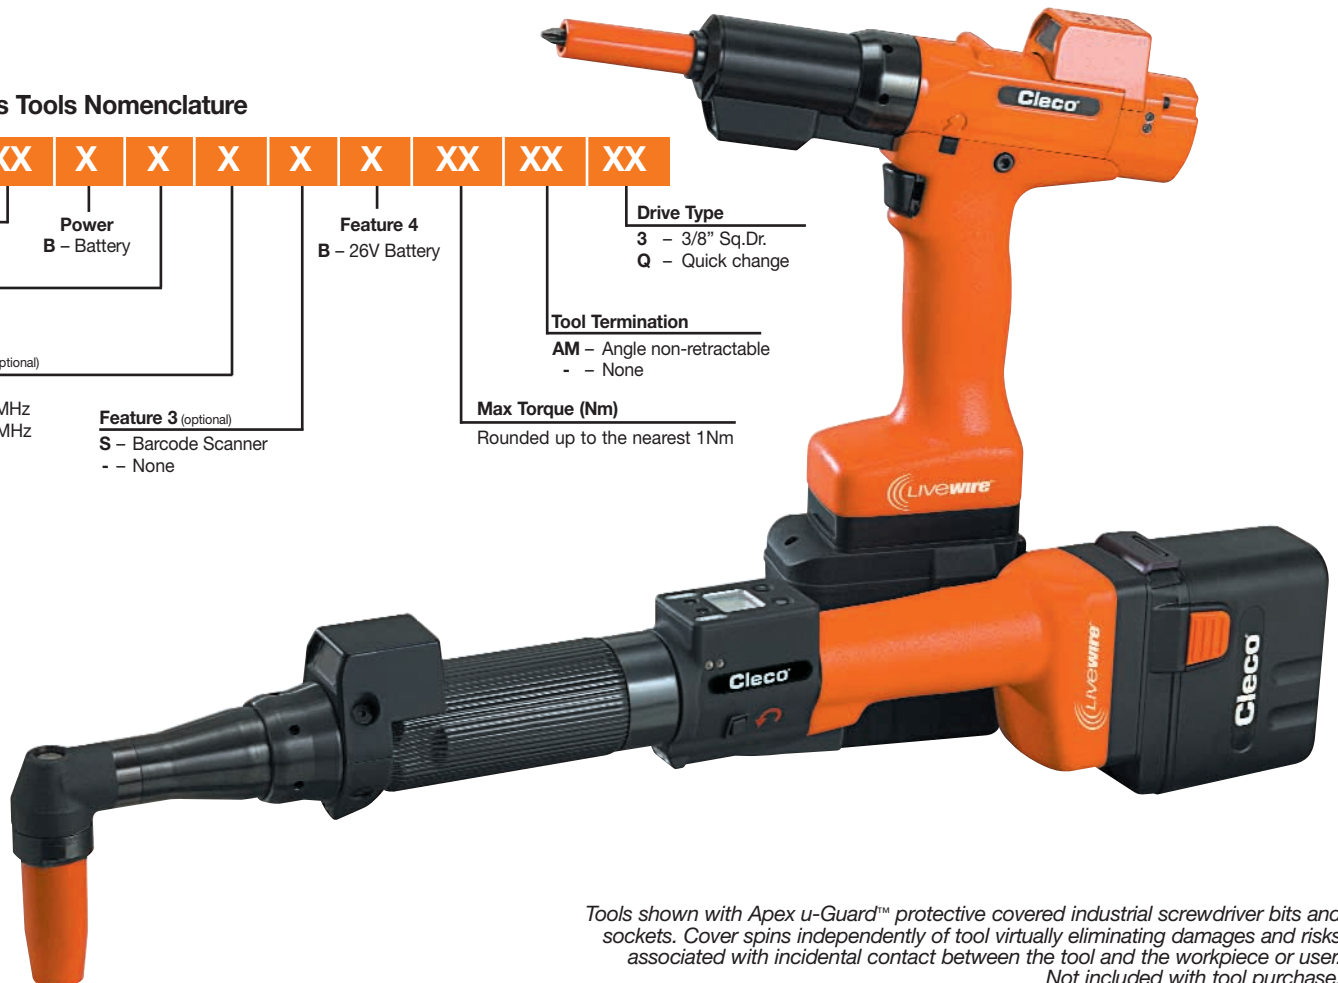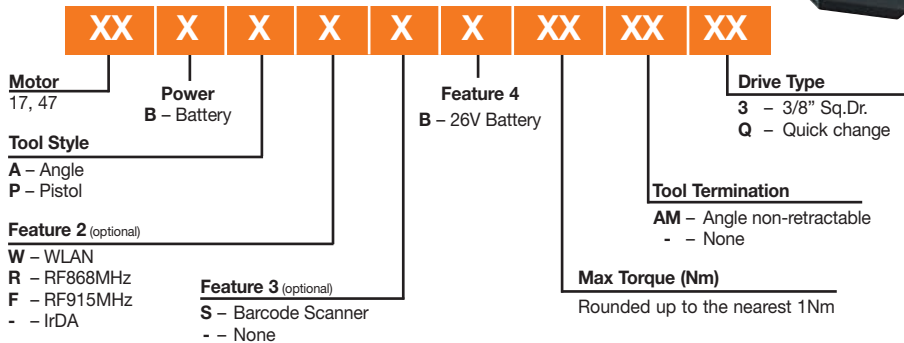

Tools shown with Apex u-Guard™ protective covered industrial screwdriver bits and sockets. Cover spins independently of tool virtually eliminating damages and risks associated with incidental contact between the tool and the workpiece or user. Not included with tool purchase.



# Cleco 17B & 47B Cordless Tool Accessories

## 1-10 Channel Line Controllers

1-10 Channel Model Number		Language	Features
115VAC	230VAC		
TMEB-220-15-U	TMEB-220-30-U	English	Standard*
TMEB-220-15-D	TMEB-220-30-D	German	Standard*
TMEB-220-15-S	TMEB-220-30-S	Spanish	Standard*
TMEB-220-15-P	TMEB-220-30-P	Portuguese	Standard*
TMEB-220-15-F	TMEB-220-30-F	French	Standard*
T3MS-14-N-15	T3M slave controller		
S112891	M-Pro-400SE, 230VAC, IRDA		
S112892	M-Pro-400SE, 230VAC, RF 868MHz		
S112894	M-Pro-400SE, 230VAC, WLAN 2.4GHz		

## Line Controller Features

- Multiple channel configuration
- Configurable 24V I/O
- Fieldbus communication options
- Ethernet TCP/IP standard
- Serial and USB ports standard
- Local data storage and troubleshooting
- High resolution color LCD (some models)
- Full programming keypad (some models)



## TMEB-COM Software

Part No.	Description
TMEB-COM-V2.03	Programming software <i>(V2.03.04 or higher)</i>

## Industrial PC & Laptop Computers

Part No.	Description
543963	Notebook computer with TMEB-COM
543964	Desktop computer with TM-COM

## USB Memory Stick

Part No.	Description
543994	1GB Data transfer device



## Ethernet Switches

Part Number	Ports			Approx. Dimensions		Approx. Weight	
	Total	In	Out	Inches	mm	Lbs.	Kg
543444-8	8	1	7	6.5x4.5x1.5	160x110x35	0.6	0.3
543444-16	16	1	15	7x6x2.5	185x150x65	1.1	0.5
543444-24	24	1	23	10.5x7x2	270x170x50	3.0	1.3

## Ethernet Cables

Part Number	Description	Length	
		Feet	Meters
543446-7	Ethernet Crossover Cable	7	2
543445-7	Ethernet Patch Cable	7	2
543445-50	Ethernet Patch Cable	50	15
543445-100	Ethernet Patch Cable	100	30

## Tool Holders

Part No.	Description
935144	Pistol tool holder w/infrared interface
935396	Pistol tool holder
935290	Angle tool holder w/infrared interface
935395	Angle tool holder



## Tool Holder Extension Cables

Part No.	Description
935154	9' (3m) extension cable
935155	19.5' (6m) extension cable
935157	33' (10m) extension cable

## Spare Battery

Part No.	Description
935377	26V Li-Ion battery <i>(1.04lbs./0.47kg)</i>



## Battery Charger

115V Part No.	220V Part No.	Description
935391	935391	26V battery charger

- Charge time: 1 hr.
- 26V Li-Ion only
- 2 color LED indicators



## Base Station

868 MHZ EU	915 MHZ NA	Description
961300	961301	Base station

Radio Range: 10-30 meters  
Max. Tools: 4



## WLAN Access Point

2.4 GHZ Eur. No.	2.4 GHZ NA No.	Description
961323	543995	WLAN Access Point

Radio Range: 30-50 meters  
IEEE 802.11b/g  
FCC ID: of Access Point  
Max. Tools: 10



## Pistol Dead Handle

Part No.	Description
301837	Reversible handle mount





# Cleco Cordless



**World's First Cordless Tools  
For Safety Critical Fastening.**

## Services & Support

Even the most durable tools need a support plan to cover maintenance. Cooper Services offers responsive customer support and maintenance services, ensuring your solution operates seamlessly and efficiently.

For more information on our wireless intelligent products, contact us at 1-800-845-5629, or visit us at [www.clecotools.com](http://www.clecotools.com).



[www.clecotools.com](http://www.clecotools.com)

**Cooper Power Tools**  
P.O. Box 1410  
Lexington, SC 29071-1410  
USA  
Phone: 800-845-5629  
803-359-1200  
Fax: 803-359-0822

**Cooper Power Tools**  
5925 McLaughlin Road  
Mississauga, Ontario  
Canada L5R 1B8  
Phone: (905) 501-4785  
Fax: (905) 501-4786

**Cooper Power Tools  
de México S.A. de C.V.**  
Libramiento La Joya No. 1  
Bodega No. 2  
Esq. Politécnico  
Barrio San José  
Cuautitlán, Edo de México  
C.P. 54870  
Phone: +52-55-5899-9510  
Fax: +52-55-5870-5012

**Cooper Tools Industrial Ltda.**  
Av. Liberdade, 4055  
Zona Industrial - Iporanga  
18087-170 Sorocaba, SP  
Brazil  
Tel: +55-15-3238-3929  
Fax: +55-15-228-3260

**Cooper Power Tools SAS**  
Zone industrielle - B.P. 28  
77831 Ozoir-la-Ferrière Cedex  
France  
Téléphone: +33-1-6443-2200  
Téléfax: +33-1-6440-1717

**Cooper Power Tools  
GmbH & Company OHG**  
Postfach 30  
D-73461 Westhausen  
Germany  
Phone: +49-7363-810  
Fax: +49-7363-81222

**Cooper Tools Hungária Kft.**  
Berkenyefa sor 7  
H-9027 Győr  
Hungary  
Tel: +36-96-505 300  
Fax: +36-96-505 301

**Cooper (China) Co., Ltd.**  
955 Sheng Li Road,  
Heqing Pudong, Shanghai  
China 201201  
Tel: +86-21-28994176  
+86-21-28994177  
Fax: +86-21-51118446

FEBRUARY 2007

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. © 2007 COOPER INDUSTRIES, INC. PRINTED IN USA. SP-1024EN 0207 5M