




LMES Models Quiet, Easy to Operate Most Portable Hoist In Its Class

The Little Mule LMES is designed to include many safety features you would expect to find in larger, more expensive hoists.

- **Capacities and Lift** - Rated loads of 1/4 and 1/2 ton. 10 and 20 foot lifts standard. Standard push button is 4 foot less than lift.
- **Voltage** - 115/1-60
- **Suspension** - Rigid top and swivel bottom hooks with safety latches standard.
- **Power Cord** - Provided with grounded 3-prong plug for easy installation in any standard 115V outlet.
- **Aluminum Housing** - Lightweight and compact to provide strength and portability. Weighs less than 25 lbs.
- **Limit Switches** - Adjustable upper and lower limit switches regulate load travel.
- **Helicon™ Gears** - Hardened steel, self-locking gears work as a brake to hold load even if power is interrupted. Permanent lubrication of gears minimizes maintenance.
- **Chain** - Manganese alloy load chain is heat treated for high strength.
- **Load Sheave** - Heat treated steel alloy load sheave provides smooth operation.
- **Overload Sensor** - Protects hoist against jamming and dangerous overloads. Red light on underside of unit alerts operator if overload is attempted.
- **Chain Container** - Included with all models.
- **Light-Duty Operation** - Rated for intermittent duty applications.
- **Lifetime Warranty**

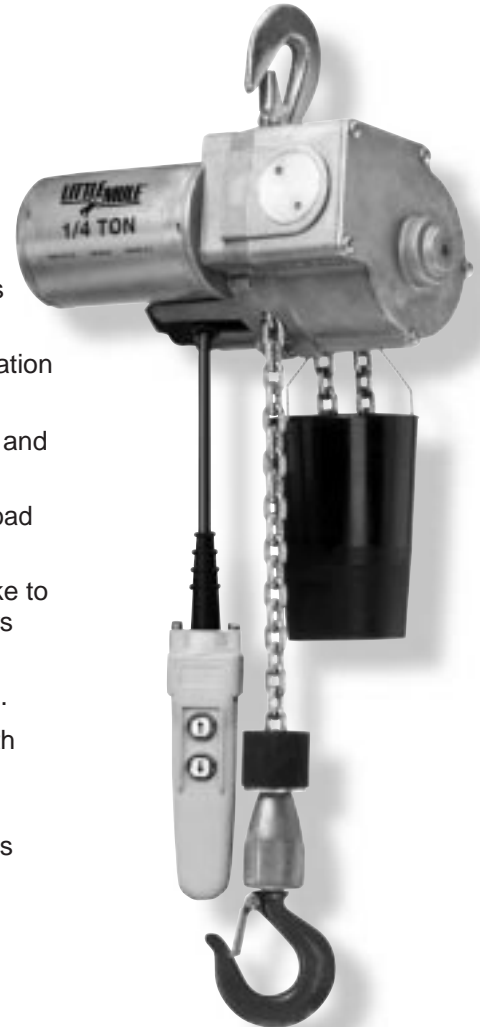


NOTE: This hoist is designed for light-duty, consumer or commercial use and is not intended for heavy-duty industrial applications.

1/4 and 1/2 Ton
Made In USA

S P E C I F I C A T I O N S

Capacity		Model Number	No. of Chains	Standard Lift (Ft.)	Motor HP	Lift Speed (FPM)	Headroom (In.)	Housing Dimensions (In.)			Voltage (1 phase)	Net Wt. (Lb.)
(Lbs.)	(Ton)							H	W	L		
500	1/4	LMES-0512-10	1	10	0.3	12	15	4 1/4	5 1/4	9 3/4	115V	16
500	1/4	LMES-0512-20	1	20	0.3	12	15	4 1/4	5 1/4	9 3/4	115V	18
1000	1/2	LMES-1006-10	2	10	0.3	6	15	4 1/4	5 1/4	9 3/4	115V	20

D I M E N S I O N S

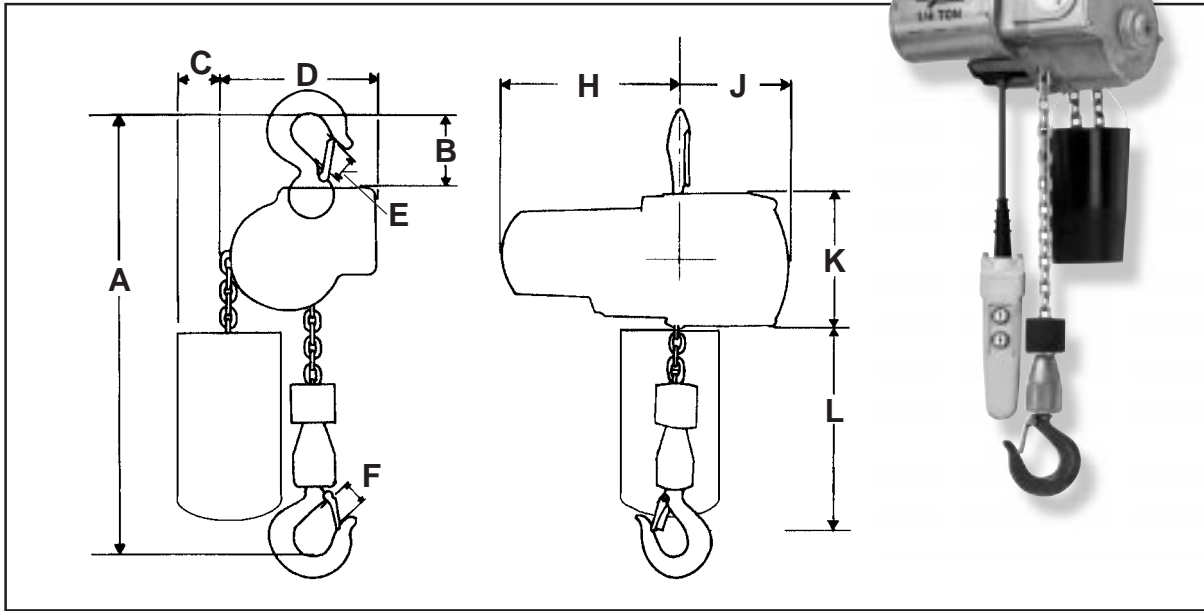

Model Number	Rated Load (Ton)	A	B	C	D	E	F	H	J	K	L
LMES-0512-10	1/4	15	3	1 1/2	5 1/4	.8	.8	6	3 3/4	4 1/4	6
LMES-0512-20	1/4	15	3	1 1/2	5 1/4	.8	.8	6	3 3/4	4 1/4	6
LMES-1006-10	1/2	15	3	2	5 1/4	.8	.8	6	3 3/4	4 1/4	8 1/2

Push button drop is approximately 4-feet less than than lift.
 Dimensions are in inches unless otherwise indicated.

⚠ WARNING

Overloading and Improper Use Can Result In Injury

To Avoid Injury:

- Do not exceed working load limit, load rating, or capacity.
- Do not use to lift people or loads over people.
- Use only alloy chain and attachments for overhead lifting.
- Read and follow all instructions.

Products To Pull You Through The Tough Jobs™



Country Club Road • PO Box 779
 Wadesboro, NC 28170 USA

Phone: (800) 477-5003 (704) 694-2156
 FAX: (800) 374-6853 (704) 694-6829