

HARRINGTON
HOISTS AND CRANES



AIR
POWERED

H O I S T S

Working Harder For You

In 1876, Edwin Harrington dramatically improved the self-sustaining hoist by introducing the worm-gear design. Since then, the company he founded has earned a proud reputation for product innovations and consistent quality that our customers count on to meet their diverse requirements.

Over the years, we have developed and grown by recognizing the value of our customers and responding to your needs. The daily mission of our organization is to provide you, the customer, with the highest quality in our products, service and support.

In addition to our superior products and expanded facilities, we offer a Sales and Customer Service team that is dedicated to serving you, a well qualified Engineering Department to support your technical needs and a full support staff who all know the importance of working together to provide solutions for your material handling projects.

We are working harder to be the supplier-of-choice for all of your hoist and crane applications.

Table of Contents

AH Mini-Cat Air Powered Hoists With Pendant and Cord Controls and Hook Suspension	
Features and Benefits	4
Standard Hoist Specifications and Dimensions	4
AH Mini-Cat Air Powered Hoists With Manipulator Control and Hook Suspension	
Unique Features and Benefits	8
Unique Hoist Specifications and Dimensions	8
AH Mini-Cat Air Powered Hoists With Lug Suspension	
Standard Specifications and Dimensions	10
AH Mini-Cat Air Powered Hoists With Options	
Standard Dimensions	11
TCR Air Powered Hoists With Pendant and Cord Controls and Hook Suspension	
Features and Benefits	12
Standard Hoist Specifications and Dimensions	12
TCRM, TCRP and TCRG Air Powered Hoists With Air Powered, Push and Geared Trolleys	
Features and Benefits	16
Standard Trolley Specifications and Dimensions	16
TCR Air Powered Hoists With Options	
Standard Dimensions	22
Technical Data	23
Product Code	25
Complete Product Offering	27

AH Mini-Cat Air Powered Hoists With Pendant and Cord Controls and Hook Suspension

The AH Mini-Cat Series of air hoists was designed with exceptionally low headroom and will easily handle many construction, assembly line and workstation applications.

Features and Benefits

Unlimited Duty Cycle

For continuous operation

Extremely Compact & Lightweight Body

Allows for easy operation, transportation and storage

Airtight Hoist

Results in efficient use of air

High Speed Lifting

Maximum speed gets jobs done quickly

Vane Motor Design

Permits very fine feathering control

Aluminum Valve Section

Reduces effects of corrosion

Low Noise Levels

Adds to operator comfort

Disc Motor Brake System

For reliable load support

Nickel Plated Load Chain

Resistant to corrosion, abrasion and wear

Standard Hoist Specifications

Capacity Range

250–500 lb.

Standard Lift

10'

(longer lifts available)

Standard Pendant or Cord Length

4' less than lift

(longer lengths available)

Air Supply Requirement

19–34 cfm at 60–90 psi

Air Lubrication

Minimum 10 to 15 drops of oil per minute (2–3cc/min.)

Air Filtration

Maximum 5 micron air filter or finer

Air Inlet Port

3/8" NPT

Air Supply Hose Minimum Size

3/8"

Operating Conditions

Temperature range +14° to 140°F

Humidity 85% or less

Chain Containers

Optional

Plastic



AH500P



AH500C

AH Mini-Cat Air Powered Hoists With Pendant and Cord Controls and Hook Suspension

PENDANT MODEL—SPECIFICATIONS

Cap. (lbs)	Product Code	Headroom (in)	Std. Lift (ft)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight with Standard Lift (lbs)	Weight for Additional One Foot of Lift (lbs)
250	AH250P	12.0	10	4 x 1	19	0.49
500	AH500P	12.0	10	4 x 1	19	0.49

Speeds—ft/min at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250P	42 (33)	55 (48)	48 (45)	43 (38)
500	AH500P	29 (18)	55 (48)	53 (51)	43 (38)


Air Consumption—cfm at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250P	28 (21)	31 (24)	27 (21)	26 (20)
500	AH500P	26 (19)	31 (24)	28 (22)	26 (20)

Values in parentheses for air supply at 60 psi.

PENDANT MODEL—DIMENSIONS

Measurements in inches

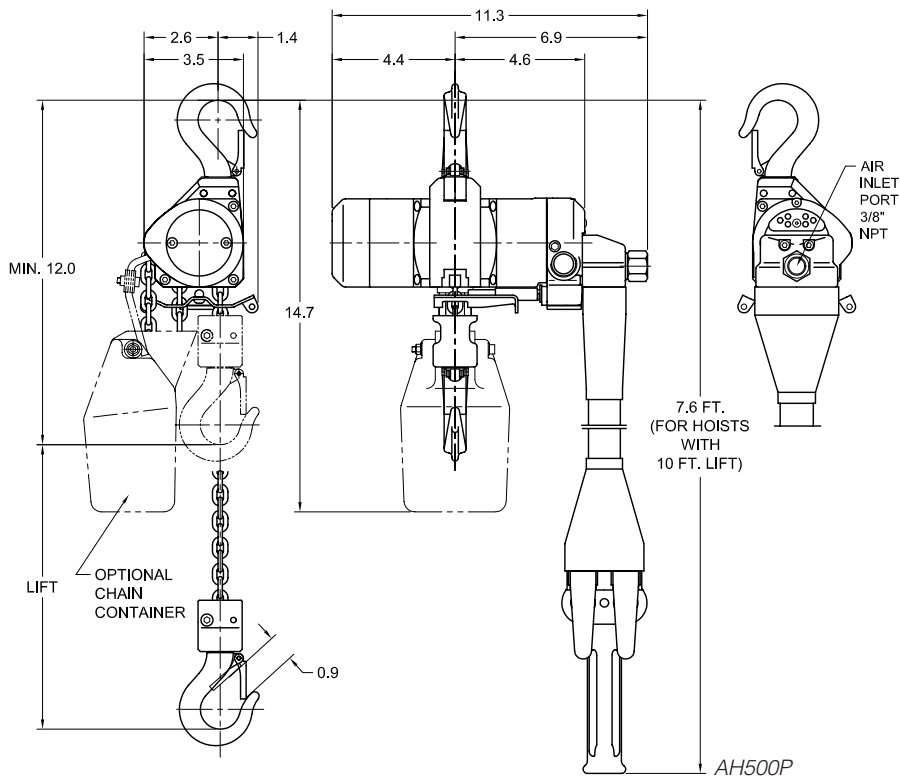

CORD MODEL—SPECIFICATIONS

Cap. (lbs)	Product Code	Headroom (in)	Std. Lift (ft)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight with Standard Lift (lbs)	Weight for Additional One Foot of Lift (lbs)
250	AH250C	12.0	10	4 x 1	15	0.26
500	AH500C	12.0	10	4 x 1	15	0.26

Speeds—ft/min at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250C	47 (37)	61 (53)	51 (47)	45 (40)
500	AH500C	32 (20)	61 (53)	56 (54)	45 (40)


Air Consumption—cfm at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250C	32 (24)	34 (27)	30 (24)	28 (23)
500	AH500C	29 (21)	34 (27)	32 (26)	28 (23)

Values in parentheses for air supply at 60 psi.

CORD MODEL—DIMENSIONS

Measurements in inches

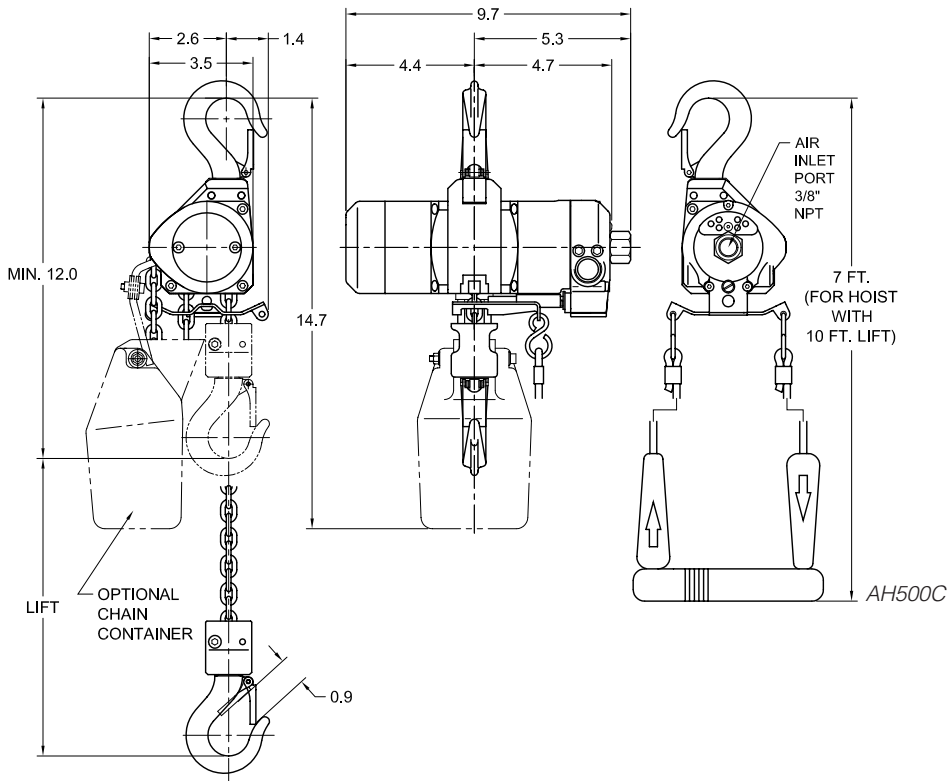

AH Mini-Cat Air Powered Hoists With Manipulator Control and Hook Suspension

Harrington's AH Mini-Cat Series air hoists also offer a unique ergonomic manipulator control feature designed to support the special repetitive working practices of assembly line and workstation areas in a wide variety of industries.

Refer to page 4 for standard hoist specifications.

Unique Features and Benefits

Manipulator Control

Unique one-handed control replaces standard pendant or cord.

This design is adjustable for either left- or right-handed operation.

Permits the operator to have a free hand to easily position the load.

Unique Hoist Specifications

Standard Lengths

6.5' Lift – 9' reach (approx.)

13' lift – 15.5' reach (approx.)
(reach equals lift plus headroom)

Chain Containers

Standard
Plastic



MANIPULATOR MODEL—SPECIFICATIONS

Cap. (lbs)	Product Code	Headroom (in)	Std. Lift (ft)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight with Standard Lift (lbs)	Weight for Additional One Foot of Lift (lbs)
250	AH250M	33.0	6.5	4 x 1	24	0.47
500	AH500M	33.0	6.5	4 x 1	24	0.47

Speeds—ft/min at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250M	41 (32)	54 (47)	47 (44)	42 (37)
500	AH500M	29 (18)	54 (47)	53 (50)	42 (37)


Air Consumption—cfm at 90 psi:

Cap. (lbs)	Product Code	Up		Down	
		Full Load	No Load	Full Load	No Load
250	AH250M	28 (21)	31 (24)	27 (21)	26 (20)
500	AH500M	26 (19)	31 (24)	28 (22)	26 (20)

Values in parentheses for air supply at 60 psi.

MANIPULATOR MODEL—DIMENSIONS

Measurements in inches

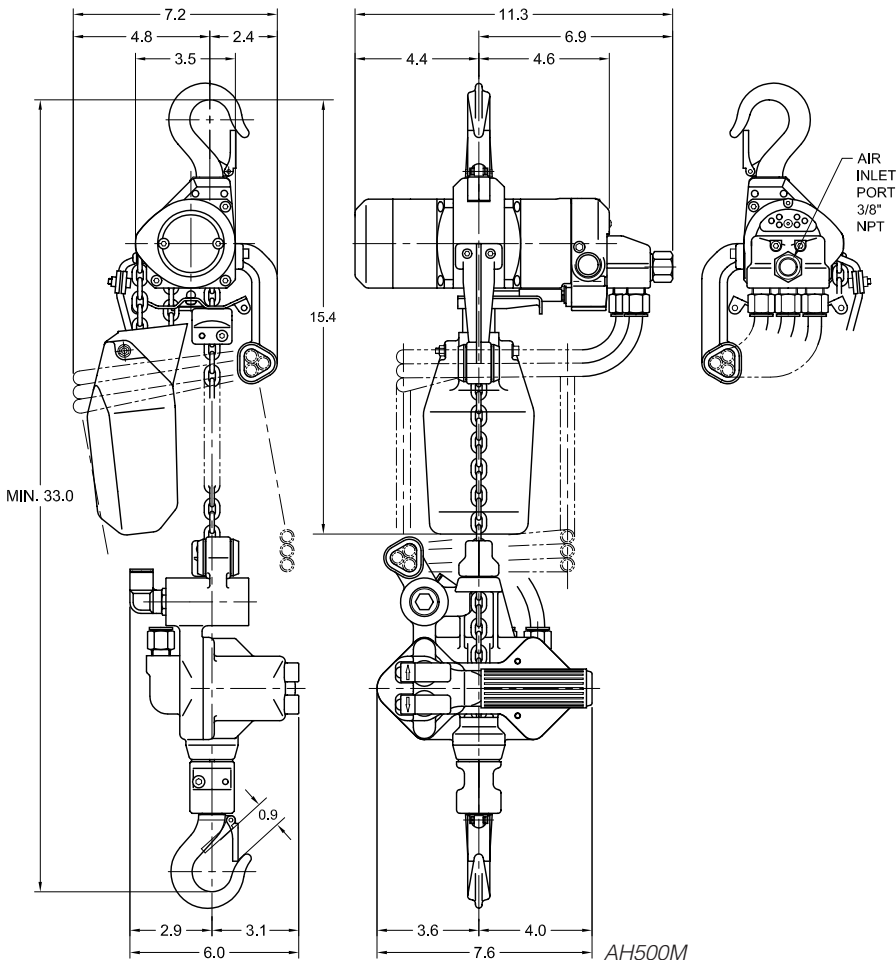

AH Mini-Cat Air Powered Hoists With Lug Suspension

MINI TROLLEY—SPECIFICATIONS

Maximum Capacity (lbs)	Product Code	Adjustable Beam Width B (in)	Minimum* Radius for Curve (in)	Net Weight (lbs)	Approximate Shipping Weight (lbs)
525	ET525	1.97–3.94	23.6	4.0	5.0

Lug mount only.


*For larger flanges, hook mount AH air hoists to PTF2/GTF2 1/2 or 1 Ton trolleys.



MINI TROLLEY—DIMENSIONS

Measurements in inches

Dimensions for pendant and cord controls are identical.

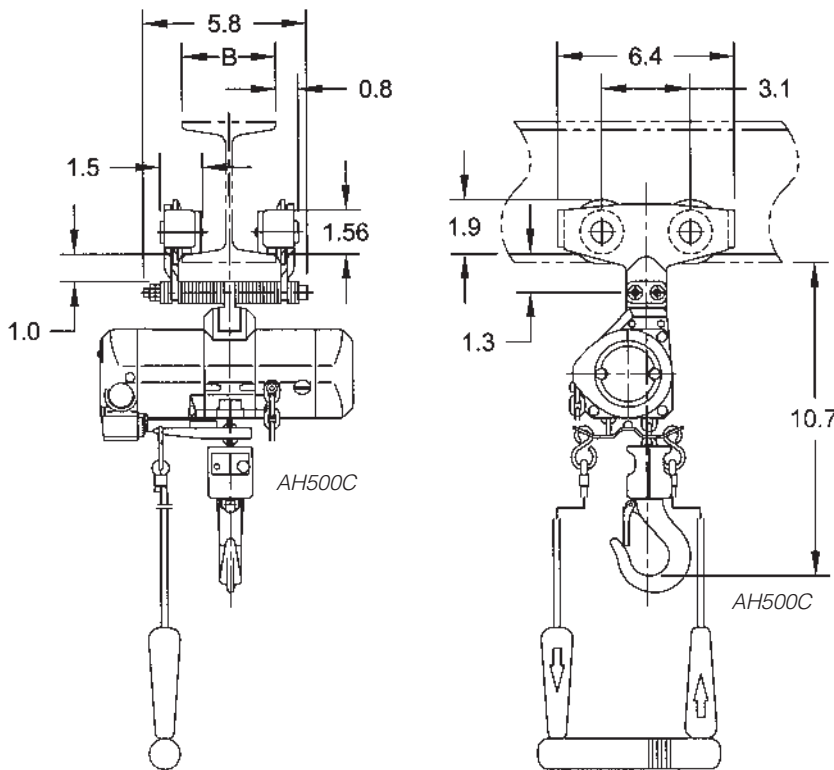


AH Mini-Cat Air Powered Hoists With Options

HOISTS WITH PLASTIC CHAIN CONTAINERS—DIMENSIONS

Hoist Product Code	Max. Lift (ft)	Container Headroom D (in)	Hoist Headroom C (in)
AH250C/P	10	14.7	12.0
AH500C/P	20	16.1	

Chain containers are easily installed.

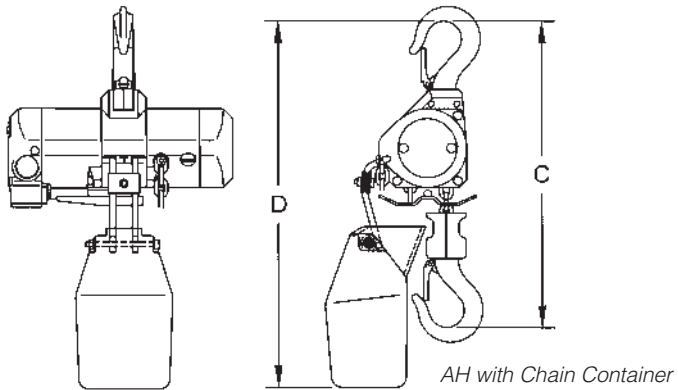


HOISTS WITH L, FL AND FRL—DIMENSIONS

Cap. (lbs)	Product Code	a (in)		b (in)	d (in)	e (in)	g (in)	h (in)		k (in)
		C	P & M					L & FL	FRL	
250	AH250C/P/M	6.6	8.2	4.7	4.4	2.6	5.3	4.2	5.5	11.7
500	AH500C/P/M	6.6	8.2	4.7	4.4	2.6	5.3	4.2	5.5	11.7

L = Lubricator

FL = Filter and Lubricator

FRL = Filter, Regulator and Lubricator

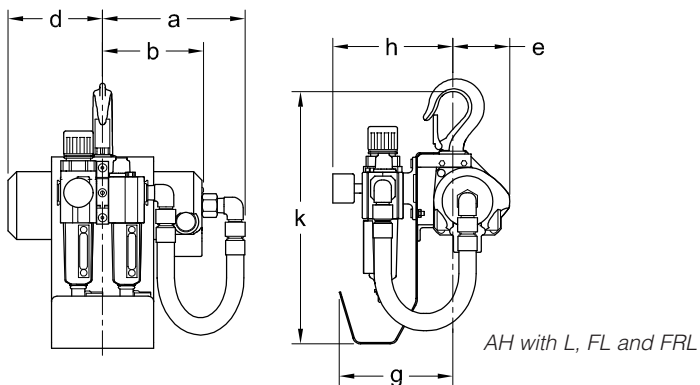

TCR Air Powered Hoists With Pendant and Cord Controls and Hook Suspension

Harrington's TCR Series air hoists offer the benefit of lifting heavier loads while maintaining low headroom and a continuous duty cycle. These hoists are best suited for use in foundries, assembly lines, construction sites and many other demanding applications.

Features and Benefits

Unlimited Duty Cycle

For continuous operation

Spring-Loaded Multi-Vane Motor Design

Permits very fine feathering control and prevents drift

High Strength Cast Iron Housing

Proven weather resistant and durable in harsh environments

Airtight Hoist

Results in efficient use of air

Comfortable Noise Levels

External muffler reduces noise level to 80dBA @ 1yd. with no load

Heavy Duty Self-Adjusting Brake

For precise braking action

Standard Upper & Lower Limit Stops

Prevents over-travel of hook in either direction

Built-in Load Limiter

Pre-set to stop lifting when load is over rated capacity
Adjustable

Wear Resistant Load Chain

Grade 80, case-hardened for superior strength

Standard Hoist Specifications

Capacity Range

1/4–6 Ton

Standard Lift

10'

(longer lifts available)

Standard Pendant or Cord Length

4' less than lift

(longer lengths available)

Air Supply Requirement

48–90 cfm at 60–90 psi

Air Lubrication

Minimum 10 to 15 drops of oil per minute (2–3cc/min.)

Air Filtration

Maximum 5 micron air filter or finer

Air Inlet Port

1/2" NPT

Air Supply Hose Minimum Size

1/4–2 Tons—1/2"

3–6 Tons—3/4"

Operating Conditions

Temperature range +14° to 140°F

Humidity 85% or less

Chain Containers

Optional

Canvas



TCR1000P



TCR1000C2


TCR Air Powered Hoists With Pendant and Cord Controls and Hook Suspension

PENDANT MODEL—SPECIFICATIONS


Cap. (Tons)	Product Code	Std. Lift (ft)	Push Button Hose L (ft)	Up/Down Speeds (ft/min @ 90 psi)		Up/Down Air Consumption Rates (cubic ft/min @ 90 psi)		Load Chain Dia. (mm) x Chain Fall Lines	Net Weight (lbs)	Weight for Additional One Foot of Lift (lbs)
				No Load	w/Full Load	No Load	w/Full Load			
¼	TCR250P	10	7.5	68/44	52/51	63/49	48/57	6.3 x 1	68	0.6
½	TCR500P		7.5	68/44	37/57	63/49	48/57	6.3 x 1	68	0.6
1	TCR1000P2		7.5	34/22	19/29	63/49	48/57	6.3 x 2	78	1.2
1	TCR1000P		7.5	37/22	21/33	62/53	53/60	7.1 x 1	77	0.8
2	TCR2000P2		7.5	19/11	11/16	62/53	53/60	7.1 x 2	88	1.5
3	TCR3000P		8.0	18/11	10/15	90/65	71/74	11.2 x 1	152	2.0
6	TCR6000P2		8.0	9/5	5/7	90/65	71/74	11.2 x 2	198	4.0

PENDANT MODEL—DIMENSIONS

Cap. (Tons)	Product Code	Headroom C (in)	a (in)	b (in)	d (in)	e (in)	g (in)	h (in)	i (in)	j (in)
¼	TCR250P	18.2	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3
½	TCR500P	18.2	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3
1	TCR1000P2	20.4	13.4	7.3	6.1	6.6	1.1	5.9	1.5	2.2
1	TCR1000P	18.3	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3
2	TCR2000P2	21.8	13.4	7.6	6.1	6.6	1.1	6.0	1.6	2.3
3	TCR3000P	22.2	17.7	8.9	8.0	9.0	1.3	1.9	6.9	1.7
6	TCR6000P2	26.5	17.7	11.1	8.0	9.0	1.7	2.5	8.7	3.4

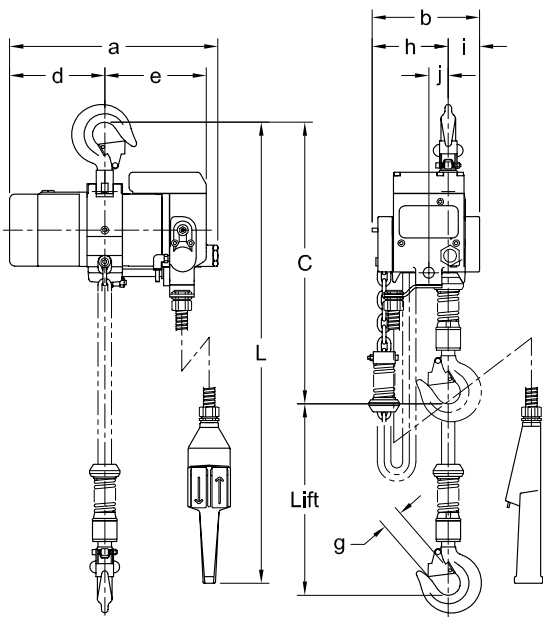

TCR500P
Single Fall Pendant Model

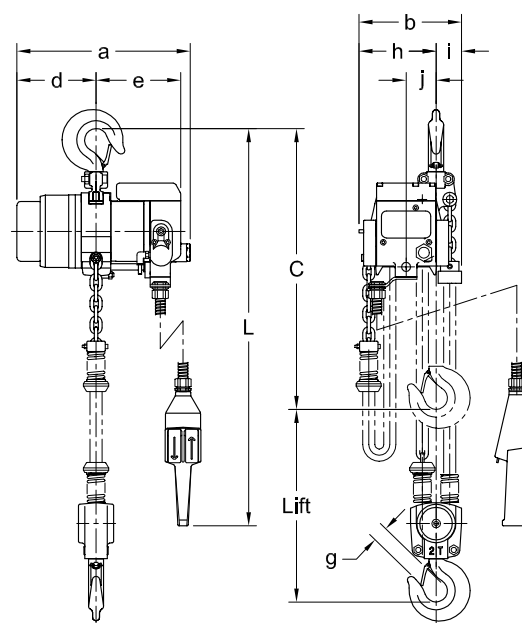


TCR2000P2
Double Fall Pendant Model

CORD MODEL—SPECIFICATIONS


Cap. (Tons)	Product Code	Std. Lift (ft)	Cord L (ft)	Up/Down Speeds (ft/min @ 90 psi)		Up/Down Air Consumption Rates (cubic ft/min @ 90 psi)		Load Chain Dia. (mm) x Chain Fall Lines	Net Weight (lbs.)	Weight for Additional One Foot of Lift (lbs)
				No Load	w/Full Load	No Load	w/Full Load			
¼	TCR250C	10	7.5	68/44	52/51	63/49	48/57	6.3 x 1	66	0.6
½	TCR500C		7.5	68/44	37/57	63/49	48/57	6.3 x 1	66	0.6
1	TCR1000C2		7.5	34/22	19/29	63/49	48/57	6.3 x 2	76	1.2
1	TCR1000C		7.5	37/22	21/33	62/53	53/60	7.1 x 1	75	0.8
2	TCR2000C2		7.5	19/11	11/16	62/53	53/60	7.1 x 2	86	1.5
3	TCR3000C		8.0	18/11	10/15	90/65	71/74	11.2 x 1	150	2.0
6	TCR6000C2		8.0	9/5	5/7	90/65	71/74	11.2 x 2	196	4.0

CORD MODEL—DIMENSIONS

Cap. (Tons)	Product Code	Headroom C (in)	a (in)	b (in)	d (in)	e (in)	g (in)	h (in)	i (in)	j (in)	k (in)
¼	TCR250C	18.2	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3	8.3
½	TCR500C	18.2	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3	8.3
1	TCR1000C2	20.4	13.4	7.3	6.1	6.6	1.1	5.9	1.5	2.2	8.3
1	TCR1000C	18.3	13.4	6.9	6.1	6.6	1.1	4.9	2.0	1.3	8.3
2	TCR2000C2	21.8	13.4	7.6	6.1	6.6	1.1	6.0	1.6	2.3	8.3
3	TCR3000C	22.2	17.7	8.9	8.0	9.0	1.3	1.9	6.9	1.7	8.3
6	TCR6000C2	26.5	17.7	11.1	8.0	9.0	1.7	2.5	8.7	3.4	8.3

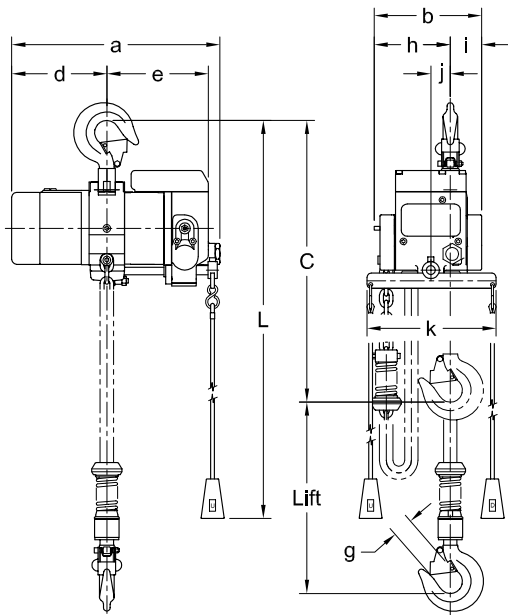

TCR500C
Single Fall Cord Model

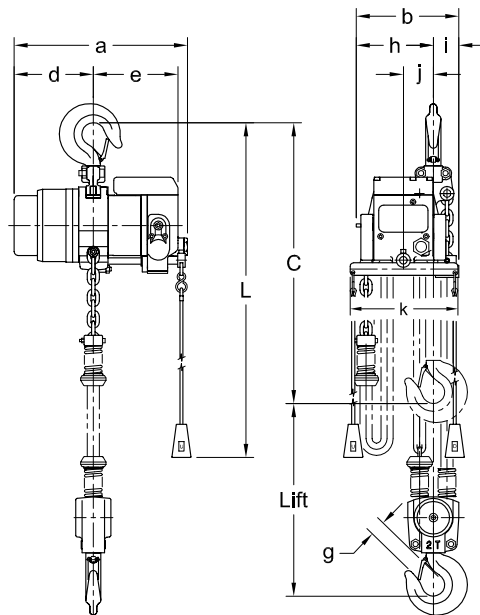

TCR2000C2
Double Fall Cord Model

TCRM, TCRP and TCRG Air Powered Hoists With Air Powered, Push and Geared Trolleys


Harrington's TCR hoists will couple with our air powered, push or geared trolleys for added mobility. The MCR air powered trolley is the ideal choice for transporting medium to heavy loads in construction and foundry applications. The economical PT or GT manual trolleys are perfect for lighter, infrequent moves and in small workshops.

Refer to page 12 for standard hoist specifications.

Features and Benefits

Standard Trolley Specifications

<p>Air Powered Trolleys</p> <p>Unlimited Duty Cycle For continuous operation</p> <p>Spring-Loaded Multi-Vane Motor Design Permits smooth operation and controlled travel</p> <p>High Strength Cast Iron Housing Proven weather resistant and durable in harsh environments</p> <p>Internal Disc Brake Protected from harsh environments</p> <p>Drop Stops & Rubber Bumpers To ensure safe operation</p> <p>Side Guide Rollers Provide additional stability and smooth travel</p> <p>Versatile Wheels Fit flat or tapered beam flange</p> <p>Trolley Muffler Produces low noise levels</p> <p>Manual Trolleys</p> <p>Shafts Standard shafts fit wide range of beams Longer shafts available for larger beams Spacers for easy adjustments</p> <p>Wheels All steel Sealed ball bearings Fit flat or tapered beam flange</p>	<p>Air Powered Trolleys</p> <p>Capacity Range 1/4–6 Ton</p> <p>Control Option on Trolley/Hoist Pendant control only</p> <p>Standard Pendant Length 4' less than lift (longer lengths available—maximum 30')</p> <p>Air Supply Requirement 53 cfm at 60–90 psi</p> <p>Air Lubrication Minimum 10 to 15 drops of oil per minute (2–3cc/min.)</p> <p>Air Filtration Maximum 5 micron air filter or finer</p> <p>Air Inlet Port 3/4" NPT</p> <p>Air Supply Hose Minimum Size 1/4–2 Tons—1/2" 3–6 Tons—3/4"</p> <p>Operating Conditions Temperature range +14° to 140°F Humidity 85% or less</p> <p>Manual Trolleys</p> <p>Capacity Range 1/4–6 Ton</p> <p>Control Option on Hoist TCRM—Pendant only TCRP and TCRG—Pendant and cord</p> <p>Standard Hand Chain Length On geared trolleys 2' less than lift (longer lengths available)</p>
---	--

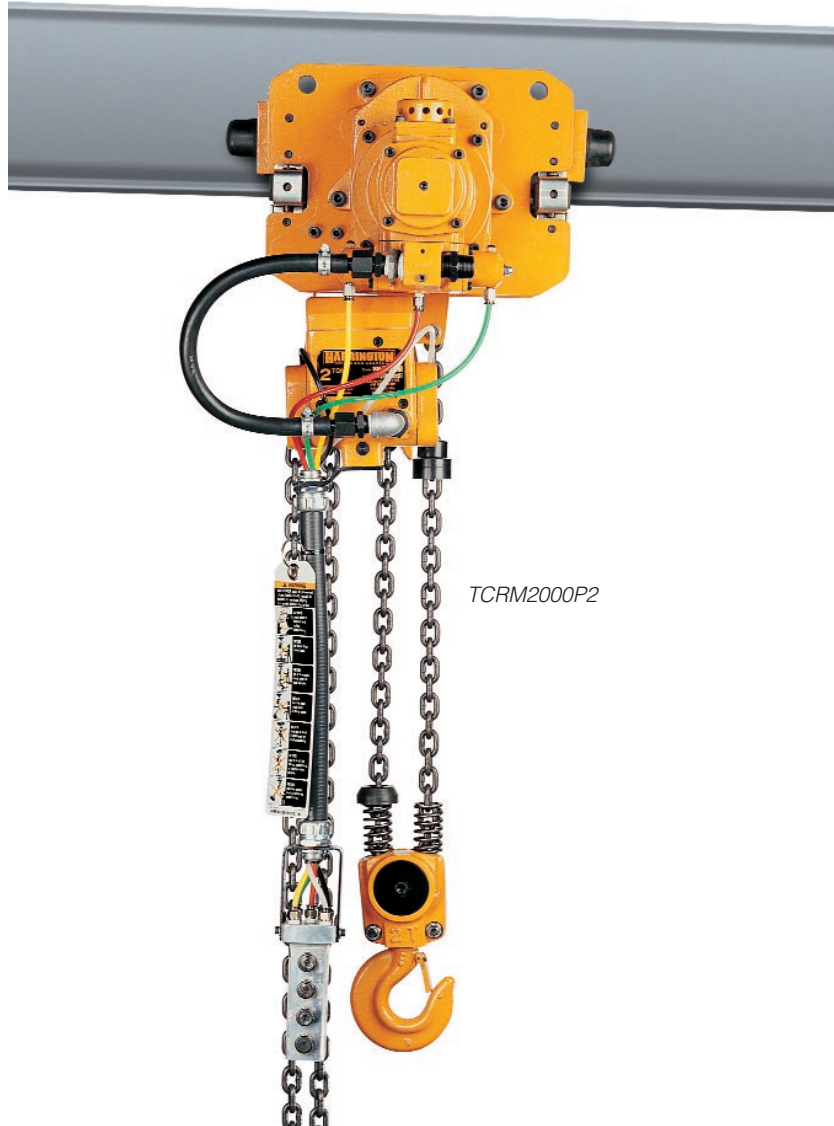

TCRM2000P2



TCRM, TCRP and TCRG Air Powered Hoists With Air Powered, Push and Geared Trolleys

PENDANT MODEL WITH AIR POWERED TROLLEYS—SPECIFICATIONS

Cap. (Tons)	Product Code	Std. Lift (ft)	Push Button Hose L (ft)	Up/Down Speeds (ft/min @ 90 psi)		Traversing Speed (ft/min)	Air Consumption Rates (cfm @ 90 psi)			Flange Width Adjustability B (in)	Min. Allow. Radius for Curve (in)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight (lbs)	Weight for Additional One Foot of Lift (lbs)
							TCR		MCR					
				No Load	Full Load		No Load	Full Load	No Load Full Load					
1/4	TCRM250P	10	7.4	68/44	52/50.5	65	63/49	48/57	53	2.28 to 5.00	137.8	6.3 x 1	170	0.6
1/2	TCRM500P			68/44	37/57		63/49	48/57	53			6.3 x 1	170	0.6
1	TCRM1000P2			34/22	18.5/28.5		63/49	48/57	53			6.3 x 2	183	1.2
1	TCRM1000P			37/22	21/33		62/53	53/60	53			7.1 x 1	209	0.75
2	TCRM2000P2			18.5/11	10.5/16.5		62/53	53/60	53	3.94 to 6.02	51.2	7.1 x 2	254	1.5
3	TCRM3000P			18/11	10/14.5		90/65	71/74	53			11.2 x 1	254	2.0
6	TCRM6000P2			9/5.5	5/7.5		90/65	71/74	53	4.92 to 7.02	78.7	11.2 x 2	364	4.0

PENDANT MODEL WITH AIR POWERED TROLLEYS—DIMENSIONS

Cap. (Tons)	Product Code	Headroom C (in)	b (in)	b' (in)	d (in)	e (in)	e' (in)	g (in)	i (in)	j (in)	k (in)	m (in)	n (in)	r (in)	t (in)
1/4	TCRM250P	19.3	12.4	15.6	10.3	6.2	3.7	1.3	3.7	0.9	4.8	4.6	4.4	2.1	1.2
1/2	TCRM500P	19.3	12.4	15.6	10.3	6.2	3.7	1.3	3.7	0.9	4.8	4.6	4.4	2.1	1.2
1	TCRM1000P2	21.5	12.4	15.6	10.3	6.2	3.7	1.3	3.7	0.9	4.8	4.6	4.4	2.1	1.2
1	TCRM1000P	19.5	12.4	15.6	10.3	6.2	3.7	1.3	3.7	0.9	4.8	4.6	4.4	2.1	1.2
2	TCRM2000P2	22.2	13.4	17.4	10.5	6.9	3.9	1.3	4.9	1.4	5.0	5.1	5.5	2.9	1.7
3	TCRM3000P	21.8	13.4	17.4	10.5	6.9	3.9	1.6	4.9	1.4	5.0	5.1	5.5	2.9	1.7
6	TCRM6000P2	25.3	15.7	19.8	10.8	8.1	4.3	2.0	5.5	1.4	5.5	5.7	6.1	3.6	2.3

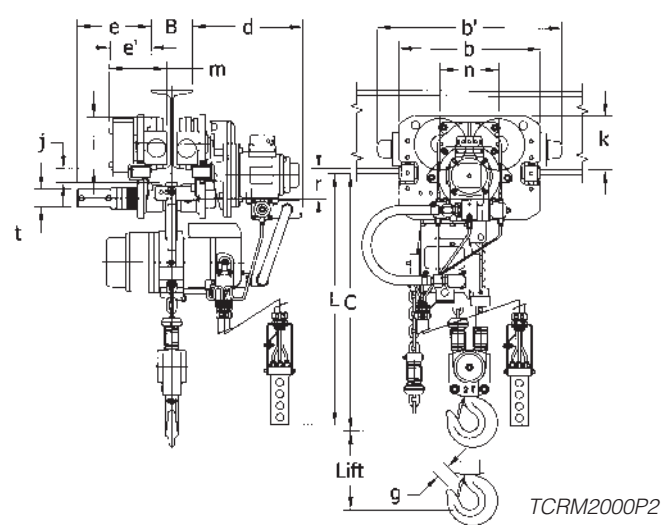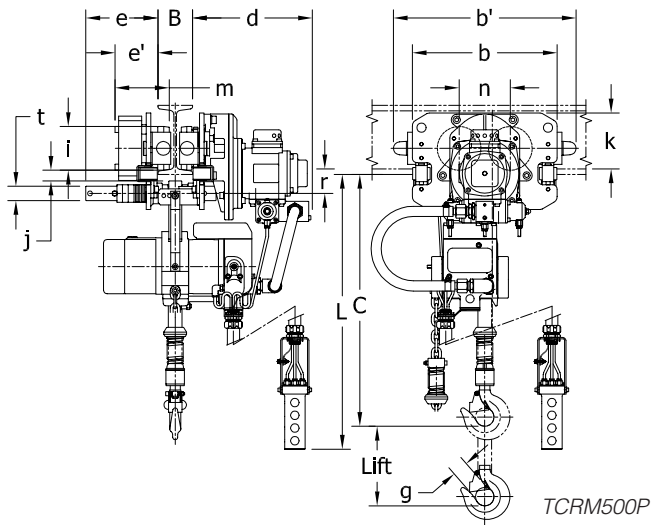

PENDANT MODEL WITH PUSH OR GEARED TROLLEYS—SPECIFICATIONS

Cap. (Tons)	Product Code	Std. Lift (ft)	Push Button Hose L (ft)	Up/Down Speeds (ft/min @ 90 psi)		Up/Down Air Consumption Rates (cubic ft/min @ 90 psi)		Flange Width Adjustability B (in)		Min.* Allow. Radius for Curve (in)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight (lbs)	Weight for Additional One Foot of Lift (lbs)
				No Load	w/Full Load	No Load	w/Full Load	Standard	Optional				
¼	TCRP(TCRG)250P	10	7.5	68/44	52/51	63/49	48/57	2.28 to 4.00 (2.28 to 5.00)	4.01 to 8.00 (5.01 to 8.00) OR 8.01 to 12.00	13.8 (51.2)	6.3 x 1	76 (96)	0.6 (1.2)
½	TCRP(TCRG)500P		7.5	68/44	37/57	63/49	48/57				6.3 x 1	76 (96)	0.6 (1.2)
1	TCRP(TCRG)1000P2		7.5	34/22	19/29	63/49	48/57	2.28 to 5.00	5.01 to 8.00 OR 8.01 to 12.00	17.7 (51.2)	6.3 x 2	94 (108)	1.2 (1.8)
1	TCRP(TCRG)1000P		7.5	37/22	21/33	62/53	53/60				7.1 x 1	91 (105)	0.8 (1.4)
2	TCRP(TCRG)2000P2		7.5	19/11	11/16	62/53	53/60	3.23 to 6.02	6.03 to 12.00	21.7 (59.1)	7.1 x 2	113 (130)	1.5 (2.1)
3	TCRP(TCRG)3000P		8.0	18/11	10/15	90/65	71/74				11.2 x 1	190 (207)	2.0 (2.6)
6	TCRP(TCRG)6000P2		8.0	9/5	5/7	90/65	71/74	5.50 to 8.66	8.67 to 12.00	118.1	11.2 x 2	409 (444)	4.0 (4.6)

Figures in parenthesis are data for geared trolley
 *Minimum flange width for curved beam: 1 Ton Push and 1/8 to 1Ton Geared = 2.87 in.
 3 Ton Push and Geared = 3.50 in.

CORD MODEL WITH PUSH OR GEARED TROLLEYS—SPECIFICATIONS



Cap. (Tons)	Product Code	Std. Lift (ft)	Cord L (ft)	Up/Down Speeds (ft/min @ 90 psi)		Up/Down Air Consumption Rates (cubic ft/min @ 90 psi)		Flange Width Adjustability B (in)		Min.* Allow. Radius for Curve (in)	Load Chain Dia. (mm) x Chain Fall Lines	Net Weight (lbs)	Weight for Additional One Foot of Lift (lbs)
				No Load	w/Full Load	No Load	w/Full Load	Standard	Optional				
¼	TCRP(TCRG)250C	10	7.5	68/44	52/51	63/49	48/57	2.28 to 4.00 (2.28 to 5.00)	4.01 to 8.00 (5.01 to 8.00) OR 8.01 to 12.00	13.8 (51.2)	6.3 x 1	74 (94)	0.6 (1.2)
½	TCRP(TCRG)500C		7.5	68/44	37/57	63/49	48/57				6.3 x 1	73 (94)	0.6 (1.2)
1	TCRP(TCRG)1000C2		7.5	34/22	19/29	63/49	48/57	2.28 to 5.00	5.01 to 8.00 OR 8.01 to 12.00	17.7 (51.2)	6.3 x 2	91 (106)	1.2 (1.8)
1	TCRP(TCRG)1000C		7.5	37/22	21/33	62/53	53/60				7.1 x 1	89 (103)	0.8 (1.4)
2	TCRP(TCRG)2000C2		7.5	19/11	11/16	62/53	53/60	3.23 to 6.02	6.03 to 12.00	21.7 (59.1)	7.1 x 2	111 (128)	1.5 (2.1)
3	TCRP(TCRG)3000C		8.0	18/11	10/15	90/65	71/74				11.2 x 1	188 (205)	2.0 (2.6)
6	TCRP(TCRG)6000C2		8.0	9/5	5/7	90/65	71/74	5.50 to 8.66	8.67 to 12.00	118.1	11.2 x 2	407 (442)	4.0 (4.6)

Figures in parenthesis are data for geared trolley
 *Minimum flange width for curved beam: 1 Ton Push and 1/8 to 1Ton Geared = 2.87 in.
 3 Ton Push and Geared = 3.50 in.

TCRM, TCRP and TCRG Air Powered Hoists With Air Powered, Push and Geared Trolleys



PENDANT AND CORD MODELS WITH PUSH TROLLEYS—DIMENSIONS

Cap. (Tons)	Product Code	Headroom C (in)	a (in)	b (in)	e (in)	g (in)	h (in)	i (in)	j (in)	k (in)	m (in)	n (in)	r (in)	t (in)
1/4	TCRP250C/P	18.6	8.0	7.2	1.8	1.1	3.2	2.36	0.5	3.0	1.9	3.3	1.5	0.87
1/2	TCRP500C/P	18.6	8.0	7.2	1.8	1.1	3.2	2.36	0.5	3.0	1.9	3.3	1.5	0.87
1	TCRP1000C2/P2	21.3	9.8	9.3	2.2	1.1	4.2	2.80	0.9	3.7	2.2	4.4	2.0	0.98
1	TCRP1000C/P	19.2	9.8	9.3	2.2	1.1	4.2	2.80	1.0	3.7	2.2	4.4	2.0	0.98
2	TCRP2000C2/P2	21.9	11.8	11.0	2.7	1.1	5.0	3.35	1.0	4.4	2.8	5.2	2.4	1.26
3	TCRP3000C/P	21.6	12.6	12.8	3.1	1.3	5.8	3.94	1.5	5.3	3.1	6.0	2.7	1.42
6	TCRP6000C2/P2	29.0	17.6	18.9	4.1	1.7	7.3	6.10	3.8	6.7	3.4	7.7	6.0	2.76

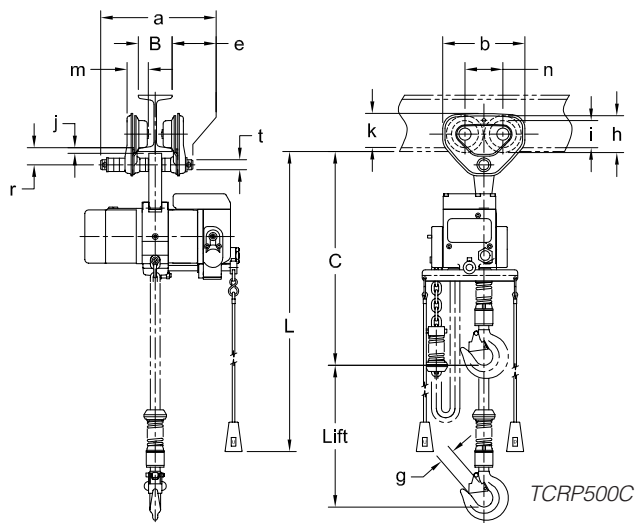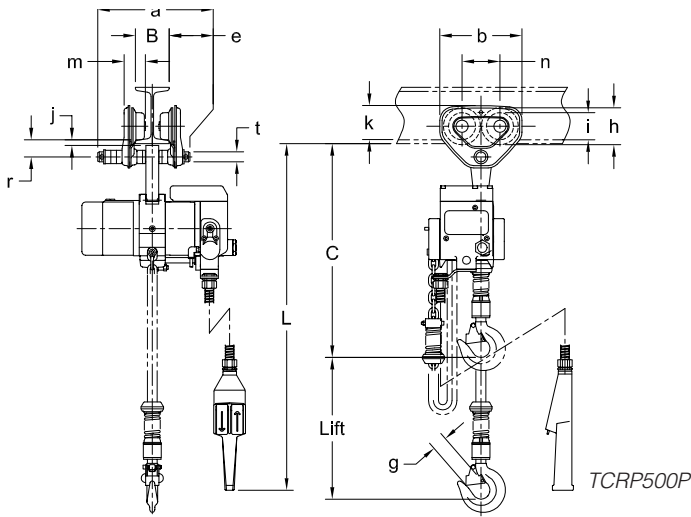

PENDANT AND CORD MODELS WITH GEARED TROLLEYS—DIMENSIONS

Cap. (Tons)	Product Code	Headroom C (in)	E (ft)	a (in)	b (in)	e (in)	g (in)	h (in)	i (in)	j (in)	k (in)	k' (in)	m (in)	n (in)	r (in)	t (in)	u (in)
¼	TCRG250C/P	19.0	10.5	20.9	9.3	13.3	1.1	4.2	2.80	1.0	3.7	4.2	2.2	4.4	2.0	0.98	7.2
½	TCRG500C/P	19.0	10.5	20.9	9.3	13.3	1.1	4.2	2.80	1.0	3.7	4.2	2.2	4.4	2.0	0.98	7.2
1	TCRG1000C2/P2	21.3	10.5	20.9	9.3	13.3	1.1	4.2	2.80	0.9	3.7	4.2	2.2	4.4	2.0	0.98	7.2
1	TCRG1000C/P	19.2	10.5	20.9	9.3	13.3	1.1	4.2	2.80	1.0	3.7	4.2	2.2	4.4	2.0	0.98	7.2
2	TCRG2000C2/P2	21.9	10.5	24.8	11.0	13.3	1.1	5.0	3.35	1.0	4.4	4.3	2.8	5.2	2.4	1.26	7.2
3	TCRG3000C/P	21.6	11.0	25.4	12.8	15.9	1.3	5.8	3.94	1.5	5.3	4.5	3.1	6.0	2.7	1.42	7.2
6	TCRG6000C2/P2	29.0	11.4	20.6	18.9	7.0	1.7	7.3	6.10	3.8	6.7	6.5	10.6	7.7	6.0	2.76	8.4

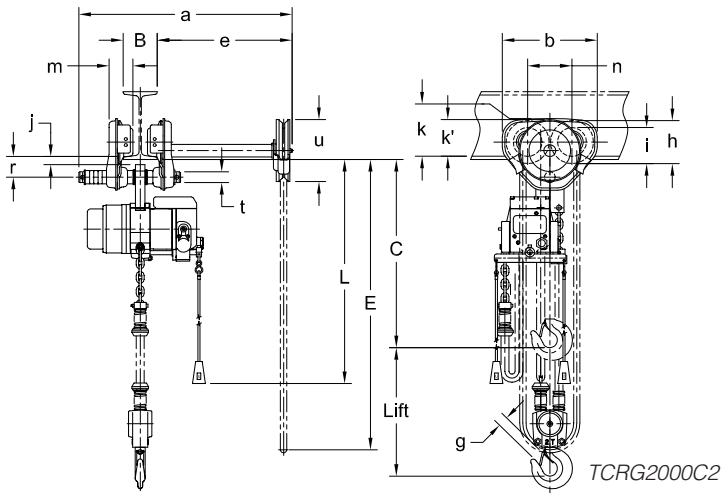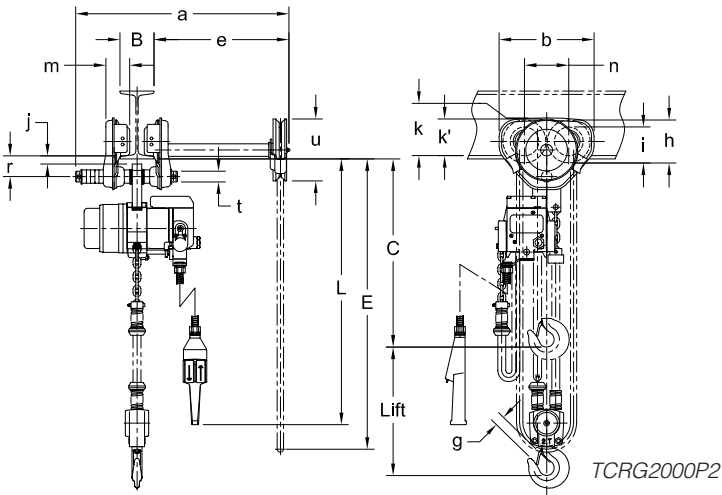


TCR Air Powered Hoists With Options

HOISTS WITH CANVAS CHAIN CONTAINERS—DIMENSIONS

Product Code	a (in)				d (in)	e (in)
	TCR	TCRM	TCRP	TCRG		
TCR250C/P	28.7	29.8	29.1	28.8	5.7	11.0
TCR500C/P	28.7	29.8	29.1	28.8	5.7	11.0
TCR1000C/P2	28.7	29.8	29.5	29.5	5.7	12.0
TCR1000C/P	28.7	29.8	29.5	29.5	5.7	11.0
TCR2000C/P2	29.7	30.1	29.7	29.7	5.7	12.1
TCR3000C/P	34.6	34.2	34.0	34.0	8.3	12.8
TCR6000C/P2	35.6	34.4	38.1	38.1	8.3	14.5

Single fall hoist shown, double fall hoist may look different.

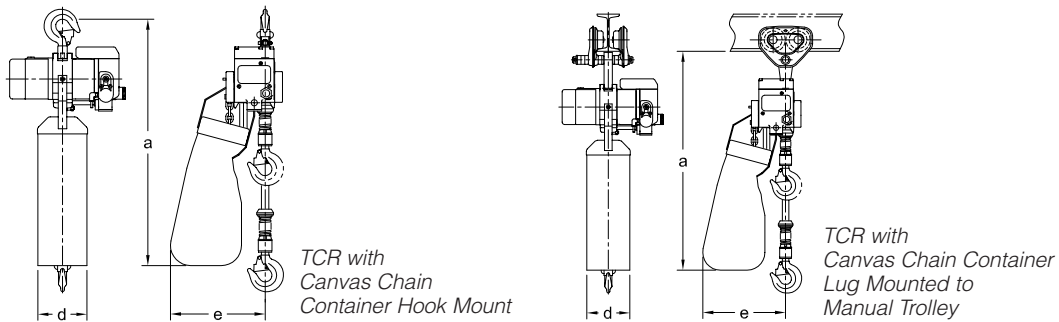


HOISTS WITH L, FL AND FRL—DIMENSIONS

Cap. (Tons)	Product Code	a (in)			b (in)	d (in)	e (in)	g (in)	h (in)	k (in)
		L	FL	FRL					FRL	
1/4	TCR250C/P	14.2	16.6	20.3	12.6	6.1	3.7	2.1	3.8	15.6
1/2	TCR500C/P	14.2	16.6	20.3	12.6	6.1	3.7	2.1	3.8	15.6
1	TCR1000C/P2	14.2	16.6	20.3	12.6	6.1	3.7	2.1	3.8	15.6
1	TCR1000C/P	14.2	16.6	20.3	12.6	6.1	3.7	2.1	3.8	15.6
2	TCR2000C/P2	14.2	16.6	20.3	12.6	6.1	3.7	2.1	3.8	16.6
3	TCR3000C/P	16.6	19.0	22.7	15.0	8.0	3.7	2.1	3.8	18.4
6	TCR6000C/P2	16.6	19.0	22.7	15.0	8.0	3.7	2.1	3.8	19.4

L = Lubricator

FL = Filter and Lubricator


FRL = Filter, Regulator and Lubricator

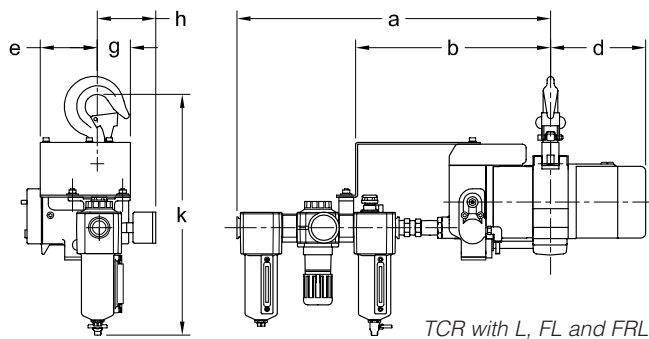

Technical Data

AH CHAIN—DIMENSIONS

Product Code	a (in)	b (in)	d (in)	p (in)
AH250C/P/M	0.20	0.53	0.16	0.48
AH500C/P/M				




TCR CHAIN—DIMENSIONS

Product Code	a (in)	b (in)	d (in)	p (in)
TCR250C/P	0.31	0.87	0.25	0.75
TCR500C/P				
TCR1000C/P2				
TCR1000C/P	0.35	0.98	0.28	0.83
TCR2000C/P2				
TCR3000C/P	0.55	1.54	0.44	1.34
TCR6000C/P2				

AH TOP AND BOTTOM HOOK—DIMENSIONS

Product Code	a (in)	b (in)	c (in)	d (in)	e (in)	f (in)	g (in)	h (in)
AH250C/P/M	0.7	0.8	0.6	0.8	1.4	1.3	0.9	2.9
AH500C/P/M	0.7	0.8	0.6	0.8	1.4	1.3	0.9	2.9



TCR TOP AND BOTTOM HOOK—DIMENSIONS

Product Code	a (in)	b (in)	c (in)	d (in)	e (in)	f (in)	g (in)	h (in)
TCR250C/P	1.4	0.9	1.1	0.9	1.6	1.6	1.1	4.2
TCR500C/P	1.4	0.9	1.1	0.9	1.6	1.6	1.1	4.2
TCR1000C/P2	1.4	0.9	1.1	0.9	1.6	1.6	1.1	4.2
TCR1000C/P	1.4	0.9	1.1	0.9	1.6	1.6	1.1	4.2
TCR2000C/P2	1.8	1.2	1.5	1.2	1.8	2.0	1.1	4.9
TCR3000C/P	2.0	1.5	1.7	1.3	2.0	2.4	1.3	5.9
TCR6000C/P2	2.3	1.6	1.9	1.6	2.6	2.8	1.7	6.8


Technical Data

TYPICAL ARRANGEMENTS OF FRL AND AIR SUPPLY HOSE LENGTHS

The connection from the air supply system piping to the hoist must be made with a flexible pressure hose. Due to normal losses in air supply lines:

- Do not use hose smaller than specified
- Limit the length of the hose to that specified below.

If your application exceeds these requirements, consult Customer Service.

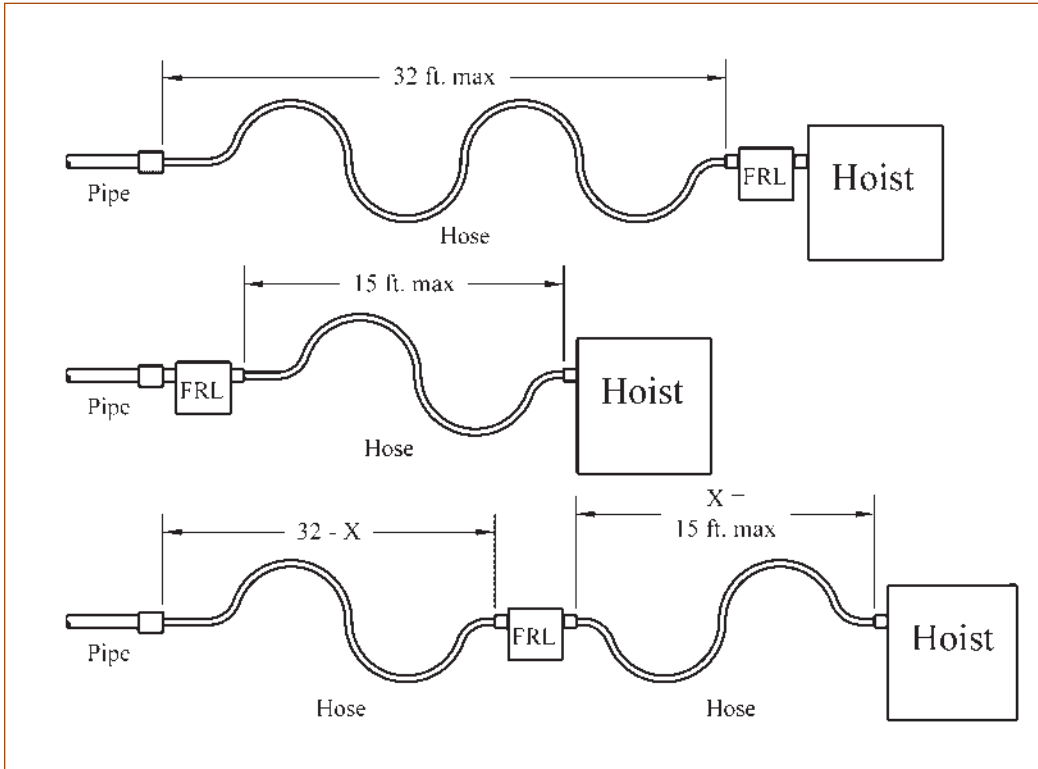


FRL = Filter, Regulator and Lubricator

BULLARD® AND SHUR-LOC® HOOKS


These hooks offer a positive locking latch feature. Consult Customer Service for full details.

Product Code

FOR AH MINI-CAT SERIES

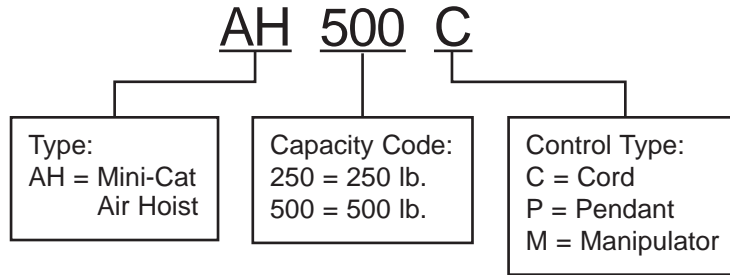

FOR TCR SERIES

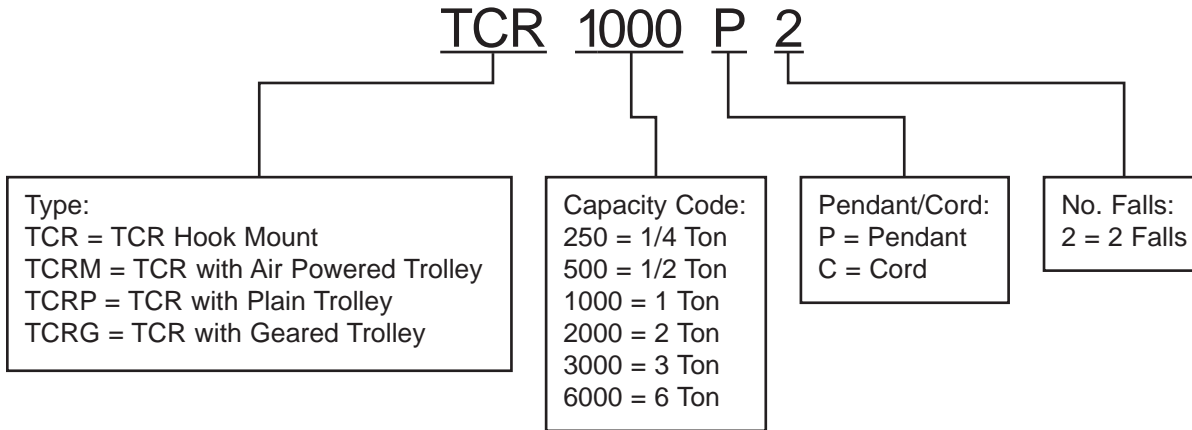

Notes

Complete Product Offering

Over the years Harrington has continued to respond to the needs of our customers by further expanding our product offerings. In addition to the many models described in this catalog, our full series of product catalogs, as shown below, will provide you with all of the information you will need to answer questions, specify a product and place an order. For catalog copies or answers to specific product questions, please contact our Customer Service Department by calling 800-233-3010 (Manheim, PA) or 800-317-7111 (Corona, CA) or e-mail customerservice@harringtonhoists.com



Manual Hoist Products Catalog:

Refer to this Harrington catalog for detailed information on the following:

- Lever hoists
- Hand chain hoists
- Hoist and trolley combinations
- Low headroom trolley hoists
- Push and geared trolleys
- Hoist load testers



Electric Powered Hoists Catalog:

Refer to this Harrington catalog for detailed information on the following:

- Three phase electric hoists and trolleys
- Single phase electric hoists and trolleys
- Ergonomic electric hoists



Electric Wire Rope Hoists Catalog:

Refer to this Harrington catalog for detailed information on the following:

- Deck/base mounted or lug suspended hoists
- Standard headroom trolley hoists
- Ultra-low headroom trolley hoists



Crane Components Catalog:

Refer to this Harrington catalog for detailed information on the following:

- End trucks-top running-motorized, geared and push
- End trucks-underhung-motorized, geared and push
- Double girder MAX-E-Lift end trucks
- Convertible push end trucks
- Beam accessory kits




Complete Cranes Catalog:

Refer to this Harrington catalog for detailed information on the following:

- Heavy duty Class C single girder top running and underhung cranes
- Heavy duty Class C double girder top running and underhung cranes
- Medium duty top running and underhung push cranes
- Crane control panels

**CONTACT YOUR NEARBY
HARRINGTON DISTRIBUTOR**



Warranty

All products sold by Harrington Hoists, Inc. are warranted to be free from defects in material and workmanship from date of shipment by Harrington for the following periods:

Manual Hoists & Trolleys—2 years

Electric Hoists, Air Hoists & Trolleys, Crane Components—1 year

Spare / Replacement Parts—1 year

The product must be used in accordance with manufacturer's recommendations and must not have been subject to abuse, lack of maintenance, misuse, negligence, or unauthorized repairs or alterations.

Should any defect in material or workmanship occur during the above time period in any product, as determined by Harrington Hoists' inspection of the product, Harrington Hoists, Inc. agrees, at its discretion, either to replace (not including installation) or repair the part or product free of charge and deliver said item F.O.B. Harrington Hoists, Inc. place of business to customer.

Customer must obtain a Return Goods Authorization as directed by Harrington or Harrington's published repair center prior to shipping product for warranty evaluation. An explanation of the complaint must accompany the product. Product must be returned freight prepaid. Upon repair, the product will be covered for the remainder of the original warranty period. If it is determined there is no defect, or that the defect resulted from causes not within the scope of Harrington's warranty, the customer will be responsible for the costs of returning the product.

Harrington Hoists, Inc. disclaims any and all other warranties of any kind expressed or implied as to the product's merchantability or fitness for a particular application. Harrington will not be liable for death, injury to persons or property, or for incidental, contingent, special or consequential damages, loss or expense arising in connection with the use or inability whatever, regardless of whether damage, loss, or expense results from any act or failure to act by Harrington, whether negligent or willful, or from any other reason.



www.harringtonhoists.com

Harrington Hoists, Inc.
401 West End Ave., Manheim, PA 17545
717-665-2000 / 800-233-3010
Fax: 717-665-2861

Harrington Hoists, Inc.—Western Division
2341 Pomona Rincon Rd., No. 103, Corona, CA 92880-6973
909-279-7100 / 800-317-7111
Fax: 909-279-7500

