



HEAVY-DUTY 1/2" MAGNUM® DRILLS

0299-20 • WITH KEYED CHUCK



VALUE AND PERFORMANCE!



BEST POWER TO WEIGHT RATIO! IMPROVED ERGONOMICS! MORE POWER!

- Powerful 8.0 Amp Milwaukee Motor
- Variable Speed Control, 0-850 RPM
- All Metal Gear Case And Diaphragm
- 360° Positive Lock Side Handle
- New Switch With Two-Finger Trigger
- Modular Brush Card Design
- All Ball And Roller Bearings


EXCLUSIVE 0302-20 FEATURE

- 8' 3-Wire Quik-Lok® Cord Sets
Quick detachment from tool for tangle free carrying and storage. Instant field repair.
- All-Metal Grip-Lok™ Keyless Chucks
For extreme durability. Carbide jaws for long life. High gripping torque prevents slippage. Lightly knurled for comfortable grip.

0300-20 • WITH KEYED CHUCK



ERGONOMIC TACTILE GRIP ON HANDLE AND MOTOR HOUSING

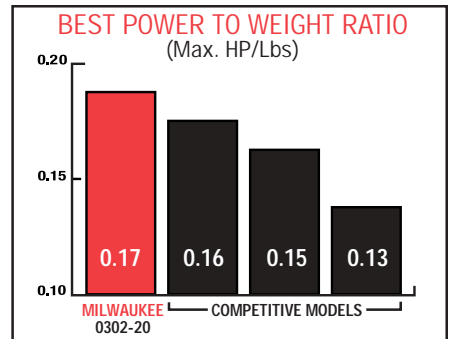


0302-20 • ALL METAL, GRIP-LOK™, SINGLE SLEEVE CHUCK • INTERNAL SPINDLE LOCK-SINGLE HAND OPERATION TO TIGHTEN/LOOSEN CHUCK



ERGONOMIC TACTILE GRIP ON HANDLE AND MOTOR HOUSING

**ALL-METAL GRIP-LOK CHUCK
2X GRIP STRENGTH ON BIT!**

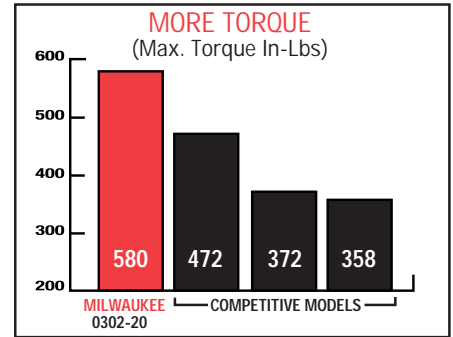

ACCESSORIES

LOCK PREVENT BUTTON

31-53-0205 For Pistol Drills and Screwdrivers.

SPECIFICATIONS

CATALOG NUMBER	CAPACITY IN STEEL	VOLTS AC ONLY	AMPS	NO LOAD RPM	GEAR TRAIN	SPINDLE DIAMETER AND THREAD	REPLACEMENT CHUCK CATALOG NO. CHUCK KEY INCLUDED	REPLACEMENT CHUCK KEY CATALOG NO.	LENGTH (IN.)	NET WGT. * LBS.	SHP. WGT. LBS.
0299-20	1/2"	120	8.0	0-850	DOUBLE	1/2-20	48-66-1355	48-66-3280	12-13/64	5.4	5.9
0300-20	1/2"	120	8.0	0-850	DOUBLE	1/2-20	48-66-1355	48-66-3280	12-13/64	5.4	5.9
0302-20	1/2"	120	8.0	0-850	DOUBLE	1/2-20	48-66-1575	---	12-1/4	5.6	6.1

STANDARD EQUIPMENT - FOR 0299-20 – 360° Side Handle 49-15-0265, 1/2" Keyed Chuck, Chuck Key, Flexible Key Holder 48-66-4040. FOR 0300-20 – 360° Side Handle 49-15-0265, 1/2" Keyed Chuck, Chuck Key, Flexible Key Holder 48-66-4040. 0302-20 – 360° Side Handle 49-15-0265, 8' 3-Wire Quik-Lok Cord 48-76-4008, 1/2" Single Sleeve All Metal Keyless Chuck.

*Weight includes cord.