



# HEAVY-DUTY GENERAL PURPOSE SCREWDRIVERS

## 6740-20

• IDEAL FOR DECKING/ DRYWALL/ FRAMING



IMPROVED  
ERGONOMICS,  
SOFT-GRIP

## 6790-20

• IDEAL FOR DRIVING  
SELF-DRILLING/TAPPING  
TEKS® FASTENERS

TEKS Registered Trademark of Illinois Tool Works, Inc.



## 6791-21 (REMODELER'S KIT)

• INCLUDES 2 DEPTH LOCATOR  
ASSEMBLIES, #2 DRYWALL BIT TIP,  
MAGNETIC BIT TIP HOLDER, 3-PIECE  
SLOTTED BIT SET AND 3-PIECE HEX  
SOCKET DRIVER SET



- Powerful 6.5 Amp Milwaukee Motor
- Variable Speed Control, 0-2500 RPM
- Lightweight Design
- Quiet Snap-Action Clutch
- Patented Locator Design Positively Maintains Setting When Removed From Tool
- Improved Guidance System For Less Run-Out
- All Metal Gear Case and Diaphragm
- Ergonomic Tactile Grip On Handle And Motor Housing
- New Switch With Two-Finger Trigger
- Removable Belt Clip With Integral Bit Storage
- Modular Brush Card Design
- All Ball And Roller Bearings

### EXCLUSIVE 6790-20 AND 6740-20 FEATURES:


- Ramp-Off Depth Locator \*
- 10' 2-Wire Rubber Cord

### EXCLUSIVE 6791-21 FEATURES:

- 2 Ramp-Off Depth Locators\* For Drywall And Self-Drill Fasteners
- 10' 2-Wire Quik-Lok® Cord

\* Patent Pending

## MORE HORSEPOWER!

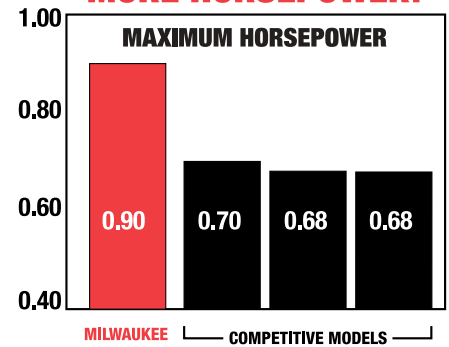

## ACCESSORIES

### HEX SOCKET EXTENSION MAGNETIC

49-66-3005 Set includes one each of:  
49-66-3006 1/4" Magnetic Socket.  
49-66-3016 5/16" Magnetic Socket.  
49-66-3026 3/8" Magnetic Socket.

### 3-PIECE 3-1/2" SLOTTED POWER BIT SET

48-30-2706 Includes a 48-30-2601 (6-7x3-1/2" slotted bit B), 48-30-2626 (8-10x3-1/2" slotted bit) and 48-30-2651 (10-12x3-1/2" slotted bit). For use on cordless driver/drills and power screwdrivers.

### STEEL CARRYING CASE

48-55-0711 For Pistol Drills and Screwdrivers. Overall size 13-1/2" long, 6" high and 8-3/4" wide.

## SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH	NET WGT.* LBS.	SHIP. WGT. LBS.
6740-20	120	6.5	0-2500	1/4" HEX	.92"	13-1/8"	3.7	4.5
6790-20	120	6.5	0-2500	1/4" HEX	.92"	12-1/8"	3.7	4.5
6791-21	120	6.5	0-2500	1/4" HEX	.92"	12-1/8"	3.7	11.7

STANDARD EQUIPMENT FOR 6740-20 – 48-32-1040 #2 Drywall Bit Tip, 48-32-3065 Magnetic Bit Tip Holder, 42-70-5280 Belt Clip, 49-26-1036 Drywall Locator Assembly. 6790-20 – 49-66-3016 5/16" Hex Socket Driver, 42-70-5280 Belt Clip, 49-26-1082 Self Drill Fastener Depth Locator Assembly. 6791-21 – 42-70-5280 Belt Clip, 49-26-1036 Drywall Depth Locator Assembly, 49-26-1082 Self Drill Fastener Depth Locator Assembly, 48-32-1040 #2 Drywall Bit Tip, 48-32-3070 Magnetic Bit Tip Holder, 48-30-2706 3-Piece Slotted Bit Set, 49-66-3005 3-Piece Hex Socket Driver Set, 48-55-0711 Steel Carrying Case with Tray And 10' 2-Wire Quik-Lok Cord 48-76-5010.

\* Weight Includes cord.