
Milwankee

11.0 AMP ORBITAL SUPER SAWZALL® KIT





- 2 ORBITAL ACTION SELECTOR*
- 3 HEAVY-DUTY STEEL QUIK-LOK BLADE CLAMP™ SYSTEM*
- 4 SMOOTH COUNTER-BALANCED MECHANISM*
- 5 PRECISION BALL AND ROLLER BEARINGS
- 6 POWERFUL 11 AMP, 3,200 SPM MILWAUKEE-BUILT MOTOR
- 7 HEAVY-DUTY STEEL DOUBLE WOBBLE PLATE MECHANISM*
- 8 GEAR PROTECTING CLUTCH*
- 9 QUIK-LOK® CORD
- 10 NEW KEYLESS ADJUSTABLE SHOE*
- 11 VARIABLE SPEED SWITCH

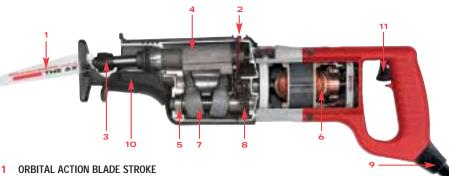

Orbital Action
Selector*
Allows the user to set the degree of orbital action.



- Heavy-Duty Steel Quik-Lok™ Blade Clamp System*
 - Fast easy blade changes with no hex key to lose.
 - Blades may be clamped upside down.
- Accepts standard 1/2" shank Sawzall blades.
- Return spring* forces spindle outward so blade clamp is accessible.

Gear Protecting Clutch*



Unique gear clutch absorbs high impact forces caused by sudden blade lock-ups. Extends life of tool in extreme cutting applications.

■ Counter Balance Mechanism*




Anti-Vibration System. Smoothest operating, most vibration free saw in the world.

- 1-1/4" Blade Stroke & Orbital Blade Stroke For fastest cutting in thick materials.
- Heavy-Duty Double Bearing Wobble Plate Mechanism* For Extra Long Life
- Powerful Milwaukee Built Motor
- Orbital Action Selector* Allows the user to set the degree of orbital versus straight reciprocating action.
- Trigger Speed Control
- Dial Speed Selector Switch*
 Matches the correct speed with application for improved control.



- Shoe Release Lever* Adjusts shoe without use of tools. Allows more efficient use of blade and depth-of-cut control.
- Pivot Shoe* For Maximum Support Against Work Surface
- Reversible Blade Mounting for Flush Cuts
- Rubber Boot For Superior Gripping and Operator Comfort
- All Ball And Roller Bearings
- Quik-Lok® Cord Instant field repair and safe replacement. Tool comes with 2-wire, 10'-16 gauge construction cord No. 48-76-5010. A 25' cord No. 48-76-5025 is also available.

*Patented



Source: Professional Service Industries, Inc. Note: Speed of cut in 1-1/8" particle board – 3 sheets clamped together

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	STROKES PER MINUTE	STEEL QUIK-LOK Blade Clamp	IMPACT PROTECTION	LENGTH OF STROKE	OVERALL LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6521-21	120	11.0	0-3200	YES	YES	1-1/4"	18-1/8"	8.9	14.5
CTANDADD FO									