




HEAVY-DUTY ELECTRIC CHAIN SAW

6215

- 16" BAR
- 1800 FEET PER MINUTE CHAIN SPEED
- POWERFUL 2-1/4 MAX. H.P. MOTOR

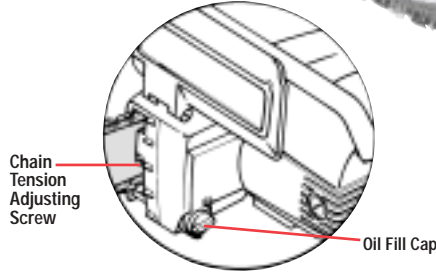

- Lightweight
- Quiet, Smooth Running Motor
- Instant Starting Even In Freezing Temperatures
- No Flammable Fuel Required – No Engine Exhaust
- Automatic Oiling
6.5 oz. capacity. Sufficient for 1 hour of continuous operation.
- Adjustable Clutch
Protects motor and mechanism from harmful binding.
- Sprocket Nose Bar For Reduced Friction
- Handguard Actuated Brake With Resettable Lockout Switch
- Low Kickback Bar And Chain Combination
- Convenient Brush Replacement
- Easy Chain Adjustment
Simply loosen one nut and adjust.

ACCESSORIES




- 48-58-0030 3/8" (9.5 mm) Pitch Chain
- 48-09-5051 16" (406 mm) Guide Bar
- 49-96-7630 13 mm Open End Wrench
- 49-62-0150 Scabbard
- 49-80-2000 Screwdriver

SPECIFICATIONS

CATALOG NUMBER	BAR SIZE	VOLTS AC ONLY	AMPS	CHAIN SPEED	OIL TANK CAPACITY	NET. WGT. LBS.	SHIP. WGT. LBS.
6215•	16" (406 mm)	120	13.0	1800 FPM	6-1/2 OZ. (190 ML)	11.3	14.0

STANDARD EQUIPMENT: Chain Saw, 16" (406 mm) Sprocket Tip Bar, 3/8" (9.5 mm) Pitch Chain, 13 mm Wrench, Screwdriver and Scabbard. • Not Available in Canada.

HACK SAW FRAMES AND BLADES

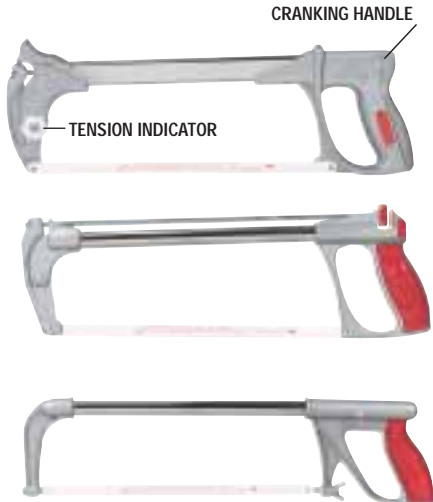

12" BI-METAL BLADE HACK SAW FRAME 48-08-0320

MILWAUKEE'S FINEST Hack Saw features built-in cranking handle to achieve higher tension required for MILWAUKEE'S Bi-Metal Blades. Tension indicator helps assure proper tension for more efficient cutting and longer blade life. Rectangular tube construction provides greater strength than ordinary hack saws. Knuckle Guard protects hands. Blades can be positioned for 90°, 45° angle or flush cutting.

DELUXE 12" HACK SAW FRAME 48-08-0300

Deluxe Hack Saw features a new method of holding blade. Blade cannot "twist" or "wobble", therefore giving a more accurate cutting stroke and a longer blade life.

10" TO 12" HACK SAW FRAME 48-08-0310

Strong aluminum die cast construction adjusts for 10" or 12" blades. Smooth comfortable front and rear handle grips. Locking screw extends all the way through tube for tighter alignment. Tube walls never press against threads of screw. Front stretcher held in snug fitting square hole—not a "punched hole" in thin wall of tubing. Good solid alignment in both 10" and 12" positions. Blade may be positioned to cut sideways absolutely flush with a surface. Cuts completely down to surface.

MILWAUKEE SUPER-TOUGH™ BI-METAL BLADES

- Outlast Conventional Blades Up To 3 Times Longer
- Requires Fewer Blade Changes
- Can Be Used In Any Hack Saw Frame But Performs Better Under High Tension Of Bi-Metal Frame.

CATALOG NUMBER	LENGTH	TEETH PER INCH	SET	QUANTITY PER PACK
48-43-0600	12"	14	RAKER	10
48-43-0610	12"	18	RAKER	10
48-43-0620	12"	24	WAVY	10
48-43-0630	12"	32	WAVY	10

TUNGSTEN CARBIDE BLADES

- Cuts Cast Iron, Ceramic Tile, Fiberglass, Slate, Brick And Marble

CATALOG NUMBER	LENGTH	TEETH PER INCH	GRIT	QUANTITY PER PACK
48-43-0200	12"	HACK	MED	1
48-43-0250	12"	ROD	N/A	1

