



July 2006

Page 1 of 2

New High Torque Models



EZ-Glider

Telescoping Torque Arms

Crafted with lightweight durable carbon fiber the arm collapses like a telescope.

Easy-to-use, requires little space and doesn't disrupt production flow.

The effortless handling of the torque arm provides comfortable tool operation and increased production.

Wall or workbench mountable. Easy to install on moving assembly line (mountable on existing standard rail).

Maintenance free.


Eliminates torque reaction of power tools.

Long arm reach capacity up to 8 ft.

New High Torque Models

High torque capacity Arms go up as high as 147.5 lbf.ft (200 N.m.)

Perfect for MVI applications.



Model	Item #	Max Torque		Clamp Dia.	Min Arm Reach	Max Arm Reach	Weight of Arm	List Price	Code
		lbft.ft	N.m						
EZ-12T	260075	8.8	12	1 - 1.5"	18.1"	37"	1.35 lbs	\$550.00	C
EZ-12T/1500	260115	8.8	12	1 - 1.5"	25.6"	59"	2.7 lbs	\$810.00	C
EZ-12T/2000	260116	8.8	12	1 - 1.5"	32.3"	78.7"	3.3 lbs	\$925.00	C
EZ-30T	260076	22.1	30	1 - 2"	18.7"	37.5"	1.5 lbs	\$595.00	C
EZ-30T/1500	260117	22.1	30	1 - 2"	25.8"	59"	3.3 lbs	\$1,010.00	C
EZ-30T/2000	260118	22.1	30	1 - 2"	32.4"	78.7"	4 lbs	\$1,125.00	C
EZ-30T/2500	260119	22.1	30	1 - 2"	39.1"	98.4"	4.4 lbs	\$1,235.00	C

Note: It is recommended to place a tool balancer above the end of the tool clamp to keep the driver in suspension for the EZ-12T & EZ-30T models



High Torque Telescoping Torque Arms

These high torque arms can be used with various tools & positioning.




Used with pistol tool




Used with angle nutrunner
(Horizontal position)



Used with angle nutrunner
(Vertical position for
lateral tightening)

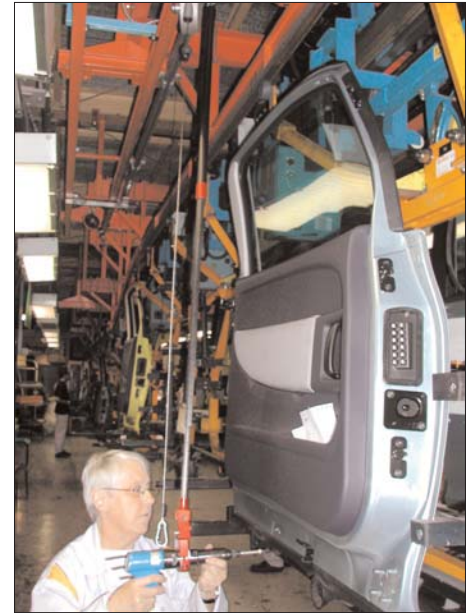

Door components assembled with a pistol air tool. Customer's problem was high torque reaction in the operator's wrist. Solution was a telescoping arm moving along the assembly line and erasing torque reaction.



Model	Item #	Max Torque		Clamp Dia.	Min Arm Reach	Max Arm Reach	Weight of Arm	Balancer Capacity	List Price	Code
		lbft.ft	N.m							
EZ-80T/1500	260120	59	80	1 - 2"	28.1"	59"	6.6 lbs	2.2 - 8.8 lbs	\$2,383.00	C
EZ-80T/2000	260121	59	80	1 - 2"	34.6"	78.7"	7.1 lbs	2.2 - 8.8 lbs	\$2,484.00	C
EZ-80T/2500	260122	59	80	1 - 2"	41.3"	98.4"	7.7 lbs	2.2 - 8.8 lbs	\$2,686.00	C
EZ-140T/1500	260123	103.3	140	1.25 - 2"	36.5"	59"	7.7 lbs	2.2 - 8.8 lbs	\$2,885.00	C
EZ-140T/2000	260124	103.3	140	1.25 - 2"	46.4"	78.7"	8.4 lbs	2.2 - 8.8 lbs	\$3,087.00	C
EZ-140T/2500	260125	103.3	140	1.25 - 2"	56.2"	98.4"	8.8 lbs	2.2 - 8.8 lbs	\$3,288.00	C
EZ-200T/1500	260126	147.5	200	*	37.4"	59"	7.7 lbs	8.8 - 13.2 lbs	\$5,039.00	C
EZ-200T/2000	260127	147.5	200	*	47.2"	78.7"	8.4 lbs	8.8 - 13.2 lbs	\$5,442.00	C
EZ-200T/2500	260128	147.5	200	*	57.1"	98.4"	8.4 lbs	8.8 - 13.2 lbs	\$5,845.00	C

Note: High torque telescoping arm models are supplied with one balancer.

*Customer must provide information (Brand & model) on the tool being used with the arm. The clamp is custom made to fit the tool being used.