


INSTRUCTIONS FOR LEVER ATTACHMENT TO HOUSING
(65499 SCREWS REPLACE 40117 PIN)

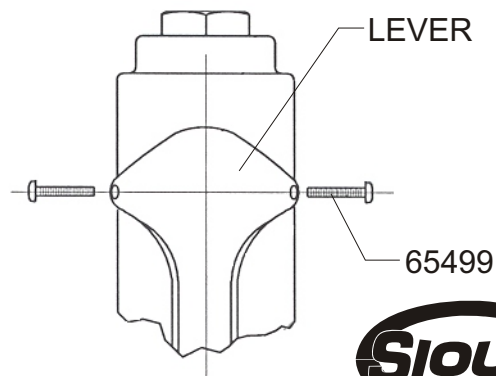

If bail is not to be used, remove by pulling each leg of the bail from the housing.

Drive two 65499 self-tapping screws into housing as shown (TORX #15 Drive.)
Stop screws before touching lever so lever will remain free.

Form Z170
06/00



**SIoux
TOOLS INC.**

250 SNAP-ON DRIVE ■ PO BOX 1596 ■ MURPHY, NC 28906 ■ USA ■