


HEAVY-DUTY SUPER SAWZALL® KIT





- SMOOTH COUNTER-BALANCED MECHANISM*
- BLADE CLAMP RETURN SPRING*
- PRECISION BALL AND ROLLER BEARINGS
- HEAVY-DUTY DOUBLE BEARING WOBBLE PLATE MECHANISM?
- **GEAR PROTECTING CLUTCH***
- POWERFUL 10 AMP MILWAUKEE-BUILT MOTOR
- VARIABLE SPEED SWITCH
- QUIK-LOK® CORD

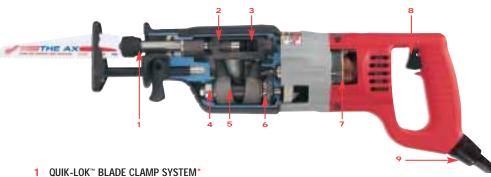

HIGH PERFORMANCE

Counter Balance Mechanism * Anti-Vibration System smoothest operating, most vibration free saw in the world.



Gear Protecting Clutch



Unique gear clutch absorbs high impact forces caused by sudden blade lock-ups. Extends life of tool in extreme cutting applications.

- Powerful Milwaukee Built Motor
- **Trigger Speed Control**
- Dial Speed Selector Switch* Matches the correct speed with application for improved control.



- Shoe Release Lever* Adjusts shoe without use of tools. Allows more efficient use of blade and depth-of-cut control.
- **Pivot Shoe For Maximum Support Against Work Surface**
- Heavy-Duty Double Bearing Wobble Plate Mechanism* For Extra Long Life
- **Rubber Boot For Superior Gripping And Operator Comfort**



- Heavy-Duty Steel Quik-Lok™ Blade Clamp
 - · Fast easy blade changes with no hex key to
 - · Blades may be clamped upside down.
 - Accepts standard 1/2" shank Sawzall
 - Return spring* forces spindle outward so blade clamp is accessible.

*Patented

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	STROKES PER MINUTE	STEEL QUIK-LOK BLADE CLAMP	IMPACT PROTECTION	LENGTH OF STROKE	OVERALL LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6537-22	120	10.0	0-3200	YFS	YFS	1-1/4"	17-7/8"	8.8	14 4

STANDARD EQUIPMENT: FOR 6537-22 - Includes Super Sawzall with Steel Quik-Lok Blade Clamp, Impact Resistant Carrying Case, 8' 3-Wire Quik-Lok Cord, One Wood Cutting Sawzall Blade And One Metal Cutting Sawzall Blade.