




HEAVY-DUTY SHARP-FIRE® SYSTEM SCREWS

SYSTEM COMPONENTS

Power Unit (Included)	6702-20	To convert extended unit to non-extended use: <ul style="list-style-type: none"> • Add 14-46-0906 Two Bend Belt Guide Assembly • Add 43-76-0296 Adapter Assembly • Add 43-72-0010 Bit Holder
Extension Tube Assy. (Included)	14-38-0677	
Screw Guide Assy. (Included)	14-38-0685	
Side Handle Assy. (Included)	14-34-0506	
Magazine Only (Included)	48-05-1005	

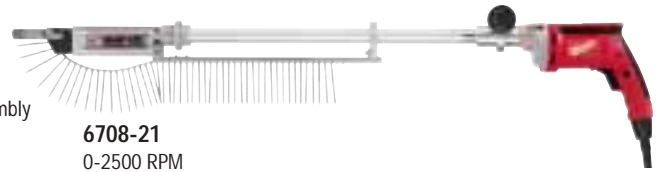


6708-21
0-2500 RPM
1-1/4" – 3"

CATALOG #	LENGTH	DRIVE	HEAD TYPE	BODY CORE DIAMETER	THREAD	POINT	FINISH	PRIMARY APPLICATIONS
Drywall Screws								
48-30-3000	1-1/4"	#2 Phillips	Bugle	#6	Coarse	Sharp	Black Phosphate	Single layer of drywall to wood studs.
48-30-3005	1-5/8"	#2 Phillips	Bugle	#6	Coarse	Sharp	Black Phosphate	Double layer of drywall to wood studs.
48-30-3010	1-1/4"	#2 Phillips	Bugle	#6	Fine	Sharp	Black Phosphate	Single layer drywall to light gauge (20-25 gauge) steel studs.
48-30-3015	1-5/8"	#2 Phillips	Bugle	#6	Fine	Sharp	Black Phosphate	Double layer drywall to light gauge (20-25 gauge) steel studs.
48-30-3020	1-1/4"	#2 Phillips	Bugle	#6	Fine	Self-Drill	Clear Zinc	Single layer drywall to heavy gauge (12-20 gauge) steel studs.
48-30-3025	1-5/8"	#2 Phillips	Bugle	#6	Fine	Self-Drill	Clear Zinc	Double layer drywall to heavy gauge (12-20 gauge) steel studs.
Underlayment Screws								
48-30-3026	1-1/4"	#2 Phillips	Small Flat	#7	Hi-Lo	Sharp	Gray Phosphate	Underlayment to wood.
Fiber Cement Screws								
48-30-3050	1-1/4"	#2 Phillips	Modified Wafer	#8	Coarse	Self-Drill	Copperhead™	Fiber Cement Board to 16-20 gauge steel, rust resistant.
48-30-3051	1-5/8"	#2 Phillips	Modified Wafer	#8	Coarse	Self-Drill	Copperhead™	Fiber Cement Board to 16-20 gauge steel, rust resistant.
48-30-3052	1-1/4"	#2 Phillips	Modified Wafer	#8	Coarse	Sharp	Copperhead™	Fiber Cement Board to wood (ideal for tile backer).
48-30-3053	1-5/8"	#2 Phillips	Modified Wafer	#8	Coarse	Self-Drill	Clear Zinc	Fiber Cement Board to 16-20 gauge steel, not rust resistant.
Flooring Screws								
48-30-3030	1-3/4"	#2 Square	Flat	#8	Coarse	Sharp	Yellow Zinc*	Subflooring.
48-30-3031	1-1/2"	#2 Square	Flat	#8	Double 14tpi	Piercing Point	Clear Zinc	Wood to steel - 3/4" plywood or OSB to 16 gauge steel.
48-30-3032	1-3/4"	#2 Square	Flat	#8	Coarse	Fluted-Point	Yellow Zinc*	High Density OSB (Advantec) or Particle Board to wood.
48-30-3033	2"	#2 Square	Flat	#8	Coarse	Piercing Point	Clear Zinc	Wood to steel - 1" to 1-1/2" wood to 16 gauge steel.
48-30-3035	2"	#2 Square	Flat	#8	Coarse	Sharp	Yellow Zinc*	Subflooring.
48-30-3036	2-1/2"	#2 Square	Flat	#8	Coarse	Sharp	Yellow Zinc*	Subflooring - Wood to wood, manufacturing, crating.
48-30-3037	3"	#2 Square	Flat	#8	Coarse	Sharp	Yellow Zinc*	Subflooring - Wall plates, wood to wood, manufacturing, crating.
48-30-3038	2-1/2"	#2 Square	Flat	#8	Coarse	Fluted-Point	Yellow Zinc*	Subflooring - Wall plates, wood to wood, manufacturing, crating, some roofing tile.
Decking Screws								
48-30-3040	2"	#2 Square	Flat	#8	Coarse	Sharp	Copperhead™**	Outdoor, treated lumber decks constructed with 5/4" top boards.
48-30-3041	2-1/2"	#2 Square	Flat	#8	Coarse	Sharp	Copperhead™**	Outdoor, treated lumber deck constructed with 2x top boards, outdoor playground equipment constructed with treated lumber, outdoor furniture constructed with treated lumber, roofing tile.
48-30-3042	2-1/2"	#2 Square	Flat	#8	Coarse	Fluted-Point	Copperhead™**	Reduced Splitting. Outdoor, treated lumber deck constructed with 2x top boards, outdoor playground equipment constructed with treated lumber, outdoor furniture constructed with treated lumber, roofing tile.
48-30-3043	3"	#2 Square	Flat	#8	Coarse	Fluted-Point	Copperhead™**	Reduced Splitting. Outdoor, treated lumber deck constructed with 2x top boards, outdoor playground equipment constructed with treated lumber, outdoor furniture constructed with treated lumber, roofing tile.
48-30-3044	2-1/2"	#2 Square	Flat	#8	Coarse	Fluted-Point	302 Stnls Steel*	Same as above - StainlessSteel Ultimate in corrosion resistance.
48-30-3045	2"	#2 Square	Flat	#8	Coarse	Fluted-Point	302 Stnls Steel*	Same as above - StainlessSteel Ultimate in corrosion resistance.
48-30-3046	3"	#2 Square	Flat	#9	Coarse	Fluted-Point	302 Stnls Steel*	Same as above - StainlessSteel Ultimate in corrosion resistance.

*With Wax

SYSTEM COMPONENTS

Power Unit (Included)	6703-20	Screw Guide Assembly 14-38-0685	Side Handle Assembly 14-34-0506
Magazine Only (Included)	48-05-1000		
Extension Tube Assembly	14-38-0677		



6707-20
0-4000 RPM
1" – 1-5/8"

CATALOG #	LENGTH	DRIVE	HEAD TYPE	BODY CORE DIAMETER	THREAD	POINT	FINISH	PRIMARY APPLICATIONS
Drywall Screws								
48-30-3000	1-1/4"	#2 Phillips	Bugle	#6	Coarse	Sharp	Black Phosphate	Single layer of drywall to wood studs.
48-30-3005	1-5/8"	#2 Phillips	Bugle	#6	Coarse	Sharp	Black Phosphate	Double layer of drywall to wood studs.
48-30-3010	1-1/4"	#2 Phillips	Bugle	#6	Fine	Sharp	Black Phosphate	Single layer drywall to light gauge (20-25 gauge) steel studs.
48-30-3015	1-5/8"	#2 Phillips	Bugle	#6	Fine	Sharp	Black Phosphate	Double layer drywall to light gauge (20-25 gauge) steel studs.
48-30-3020	1-1/4"	#2 Phillips	Bugle	#6	Fine	Self-Drill	Clear Zinc	Single layer drywall to heavy gauge (12-20 gauge) steel studs.
48-30-3025	1-5/8"	#2 Phillips	Bugle	#6	Fine	Self-Drill	Clear Zinc	Double layer drywall to heavy gauge (12-20 gauge) steel studs.
Underlayment Screws								
48-30-3026	1-1/4"	#2 Phillips	Small Flat	#7	Hi-Lo	Sharp	Gray Phosphate	Underlayment to wood.